


## SERIES 2000 MICRO READER

### FEATURES

- Best in Class Performance Through Patented HDX Technology
- RS232 Interface (5 Volt Logic Level)
- Multi Purpose I/Os
- Proven in Harsh Industrial Environments
- Easy to Design in and Use

### APPLICATIONS

- Access Control
- Vehicle Identification
- Container Tracking
- Asset Management
- Waste Management

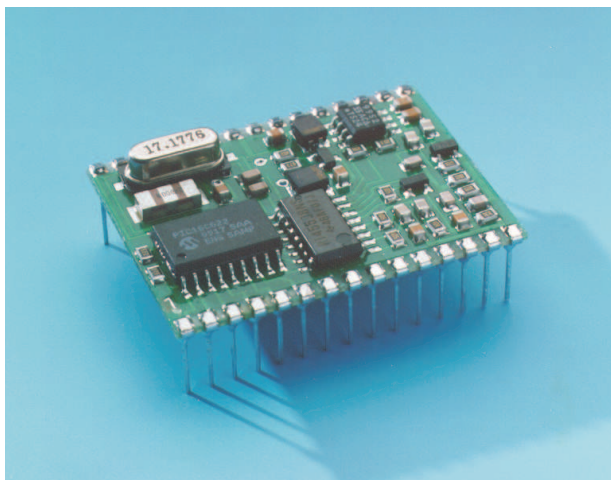

### DESCRIPTION

The Series 2000 Micro Reader is an intelligent module that provides all RF and control functions in order to communicate with 134.2 kHz HDX/FSK transponders and a host application. It is designed as a 30-pin Dual in-line printed circuit board. The Series 2000 Micro Reader is equipped with a serial communication interface (RS232, 5 Volt level) and works in combination with a 47  $\mu$ H low-Q antenna that eliminates the need to tune the system to resonance. It converts the received RF signals to the transponder's identification number, checks the validity and handles the conversion to the RS232 serial interface protocol.

The RI-STU-MRD1 is well suited for usage in a broad range of applications including, but not limited to, access control, vehicle identification, container tracking, asset management and waste management applications.

### ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

	RI-STU-MRD1	UNIT
Operating Temperature	–20 to +50	°C
Storage Temperature	–40 to +85	°C

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

**OPERATING CHARACTERISTICS**

over operating free-air temperature range (unless otherwise noted)

PARAMETER	PART NUMBER	UNIT
	RI-STU-MRD1	
Relative Humidity	<97% non-condensing, IEC 68-2-30 Test Db, 21 cycles	
RF Transmit Frequency	134.2	kHz
Power Supply	5 Vdc, regulated	
Typical Current Consumption	Active mode: 100 Idle mode: 5	mA
Host Communication	Point-to-Point	
Communications Parameters	9600 baud, 8 data bits, no parity, 1 start bit, 1 stop bit	
Communications Protocol	Micro Reader specific communications protocol with Xon / Xoff handshake	
Communications Interface	Serial Communications Interface (SCI), TTL voltage level	
Reader Interference Protection	Wireless and wired synchronization	
Antenna	47 $\mu$ H, Q 10 – 20	
Typical Read Time	Without synchronization: 100 With synchronization: 120	ms
Transponder Types	134.2 HDX/FSK	kHz
Package	30-pin Dual-in-line for plug- or to solder-in	
Reference Documentation	11-06-21-027 (SCBU027) Reference Guide S2000 Reader System Micro Reader RI-STU-MRD1	
Dimensions	(38.3 $\times$ 29.3 $\times$ 13.5) $\pm$ 0.5	mm
Weight	approx. 5	g
Approval	CE, FCC	

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

<b>Products</b>		<b>Applications</b>	
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>	Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>	Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>	Broadband	<a href="http://www.ti.com/broadband">www.ti.com/broadband</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>	Digital Control	<a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>	Military	<a href="http://www.ti.com/military">www.ti.com/military</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>	Optical Networking	<a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>	Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Low Power Wireless	<a href="http://www.ti.com/lpw">www.ti.com/lpw</a>	Telephony	<a href="http://www.ti.com/telephony">www.ti.com/telephony</a>
		Video & Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>
		Wireless	<a href="http://www.ti.com/wireless">www.ti.com/wireless</a>

Mailing Address: Texas Instruments  
Post Office Box 655303 Dallas, Texas 75265