

●新特器件应用

10 位串行模数转换芯片 AD7810 的原理及应用

株洲职业技术学院 凌云

Principle and Application of 10-bit Serial A/D Converter AD7810

Ling Yun

摘要: 文章对高速低功耗 10 位串行模数转换芯片 AD7810 的引脚功能、主要参数、特性及典型应用作了详尽的介绍,同时给出了微处理器 PIC16C6X/7X 以及 8051 单片机与 AD7810 模数转换器的通讯接口电路和程序清单。

关键词: AD7810; 低功耗; 模数转换; 单片机

分类号: TN79+2 **文献标识码:** B **文章编号:** 1006-6977(2002)01-0053-03

AD7810 是美国模拟器件公司 (Analog Devices) 生产的一种低功耗 10 位高速串行 A/D 转换器。该产品有 8 脚 DIP 和 SOIC 两种封装形式,并带有内部时钟。它的外围接线极其简单,AD7810 的转换时间为 $2\mu\text{s}$, 采用标准 SPI 同步串行接口输出和单一电源 ($2.7\text{V} \sim 5.5\text{V}$) 供电。在自动低功耗模式下,该器件在转换吞吐率为 1kSPS 时的功耗仅为 $27\mu\text{W}$, 因此特别适合于便携式仪表及各种电池供电的应用场合使用。

1 AD7810 引脚功能

AD7810 引脚排列如图 1 所示,各引脚的功能如下:

- 1 脚 $\overline{\text{CONVST}}$: 转换启动输入信号。
- 2 脚 $\text{VIN}+$: 模拟信号同相输入端。
- 3 脚 $\text{VIN}-$: 模拟信号反相输入端。
- 4 脚 GND: 接地端口。
- 5 脚 VREF: 转换参考电压输入端。
- 6 脚 DOUT: 串行数据输出端。
- 7 脚 SCLK: 时钟输入端。
- 8 脚 VDD: 电源端。

2 AD7810 主要参数

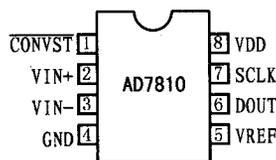


图 1 AD7810 的引脚排列

AD7810 的主要参数如下:

- 分辨率: 10 位二进制;
- 转换时间: $2\mu\text{s}$;
- 非线性误差: $\pm 1\text{LSB}$;
- 电源电压范围: $2.7 \sim 5.5\text{V}$;
- 电源功耗: 高速方式时为 17.5mW , 低功耗方式时为 $5\mu\text{W}$;
- 参考电压 V_{ERR} 范围: $1.2\text{V} \sim V_{\text{DD}}$;
- 模拟电压输入范围: $0\text{V} \sim V_{\text{REF}}$;
- 输出形式: SPI 同步串行输出, 与 TTL 电平兼容。

3 AD7810 的工作模式

3.1 高速模式

图 2 是 AD7810 工作在高速模式时的时序图。在此模式下,启动信号 $\overline{\text{CONVST}}$ 一般处于高电平。在 $\overline{\text{CONVST}}$ 端输入一个负脉冲,其下降沿将启动一次转换。若采用内部时钟,那么,转换需要 $2\mu\text{s}$ 的时间(图中 t_1)。当转换结束时(图中 A 点),AD7810 会自动将转换结果锁存到输出移位寄存器中。此后,在每一个 SCLK 脉冲的上升沿,数据按由高到低的原则(首先发送 DB9,最后发送 DB0)依次出现

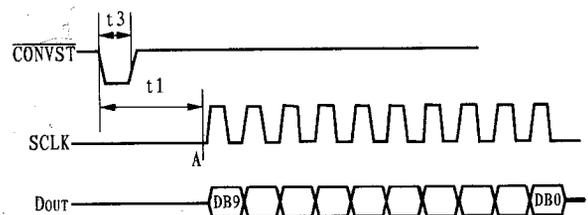


图 2 高速模式时序

在DOUT上。如果在转换还未结束之前就发出 SCLK 信号来启动数据输出,那么,在 DOUT上出现的将是上一次转换的结果。

启动信号 $\overline{\text{CONVST}}$ 应在转换结束前变为高电平,即 t_3 应小于 t_1 , 否则器件将自动进入低功耗模式。另外,串行时钟 SCLK 的最高频率不能超过 20MHz。

3.2 自动低功耗模式

图 3 是 AD7810 工作在自动低功耗模式时的时

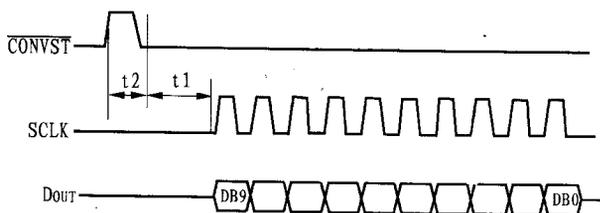


图 3 自动低功耗模式时序

序图。在此模式下,启动信号 $\overline{\text{CONVST}}$ 为低电平时,器件处于低功耗休眠状态。当在 $\overline{\text{CONVST}}$ 端输入一个正脉冲时,可在其上升沿将器件从休眠状态唤醒,唤醒过程需要 $1\mu\text{s}$ 的时间(图中 t_2)。当器件被唤醒后,系统将自动启动一次转换,转换时间也是 $2\mu\text{s}$ (图中 t_1)。转换结束时,AD7810 将转换结果锁存到输出移位寄存器中,同时自动将器件再一次置于低功耗状态。

启动信号 $\overline{\text{CONVST}}$ 正脉冲的宽度(图 2 中 t_3)应小于 $1\mu\text{s}$, 否则器件被唤醒后将不会自动启动转换,而是将 A/D 转换的启动时间顺延至 $\overline{\text{CONVST}}$ 的下降沿处。自动低功耗模式是 AD7810 的一大特色,一般当数据吞吐率小于 100kSPS 时,应使器件工作在此模式下。在 5V 电源电压下,当数据吞吐率为 100kSPS 时,器件的功耗为 2.7mW ; 而当数据吞吐率为 10kSPS 时,功耗为 $270\mu\text{W}$; 若数据吞吐率为 1kSPS,则其功耗仅 $27\mu\text{W}$ 。

4 AD7810 的典型应用

AD7810 应用时几乎不需外围元件。图 4 所示是其典型应用电路,其参考电压 VREF 接至 VDD, 模拟输入 VIN- 接至 GND, 而待转换电压则从 VIN+ 输入。

AD7810 几乎可与各种 MCU 进行接口,图 4 中的 MCU 可以是 8051 或 PIC16C6X/7X。当与

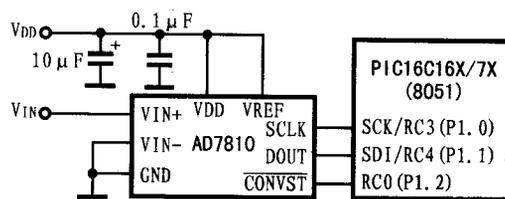


图 4 AD7810 典型应用

PIC16C6X/7X 系列单片机进行接口时,可将 SCLK 接至单片机的 SCK(RC3),将 DOUT 接至 SDI(RC4),而其启动信号 $\overline{\text{CONVST}}$ 则可接到单片机的任意输出端口上(如 RC0)。由于 PIC 单片机的 SPI 方式每次只能接收 8 位数据,因此 10 位数据应分两次读取。当 AD7810 与 8051 接口时,电路采用的是一种模拟串口方式,AD7810 的 SCLK、DOUT 和 $\overline{\text{CONVST}}$ 分别接到 8051 的 P1.0、P1.1 和 P1.2,只要严格按照 AD7810 的时序要求操作,一般接口都不会有问题。这种方式实际上可扩展到所有的 MCU 种类。另外,8051 也可利用其串行口工作方式 0 与 AD7810 进行通讯(图中未画出),但这时应解决好两个问题:一是由于 8051 在 TXD 的上升沿进行采样,这样,TXD 应经过一个反相器再接到 SCLK,而将 RXD 接到 DOUT,然后将 $\overline{\text{CONVST}}$ 接至任意一个输出端口。二是 8051 串行口首先接收低位数据,这一点与 AD7810 刚好相反,因此,编程时应当注意。

下面给出 PIC16C6X/7X 和 8051 分别与 AD7810 进行通讯的两段程序,作者只对与 A/D 转换有关的部分进行了编写(常用资源定义、芯片定义等均未列出),两段程序均可将 AD7810 的工作控制在自动低功耗方式。8051 与 AD7810 通讯程序如下:

```

START: CLR      P1.0      ;初始化
        SETB     P1.1
        CLR      P1.2
LOOP:  CALL     CONO
        . . .
        ;主程序省略
;
; A/D 转换子程序,返回时数据低 8 位在 R2 中,
; 高 2 位在 R3 中
CONO:  MOV      R1, # 10  ;10 位数据
        MOV      R2, # 0
        SETB     P1.2      ;唤醒启动 AD7810
        CLR      P1.2
    
```

```

CON1: SETB    P1.0    ;发送 SCLK 信号          高 2 位在 REG2 中
      MOV     C,P1.1  ;读一位数据          ADCON BSF    PORTC,0    ;唤醒启动 AD7810
      CLR     P1.0
      MOV     A,R2    ;数据移位          BCF    PORTC,0
      RLC
      MOV     R2,A    CON1 BTFSS  SSPSTAT,BF  ;数据已接收?
      MOV     A,R3    GOTO   CON1    ;没有收到
      RLC          BCF    STATUS,RP0
      MOV     R3,A    MOVWF  SSPBUF    ;启动接收高 8 位
      DJNZ   R1,CON1 BSF    STATUS,RP0
      RET          CON1 BTFSS  SSPSTAT,BF  ;数据已接收?
                  GOTO   CON1    ;没有收到
                  BCF    STATUS,RP0
                  MOVF  SSPBUF,W
                  MOVWF  REG1    ;高 8 位送 REG1
                  MOVWF  SSPBUF    ;启动接收低 2 位
                  BSF    STATUS,RP0
    
```

PIC16C6X/7X 与 AD7810 的通讯程序如下:

```

REG1 EQU    0X20    ;寄存器定义          CON1 BTFSS  SSPSTAT,BF  ;数据已接收?
REG2 EQU    0X21
      CLRF   PORTC    ;端口初始化          GOTO   CON1    ;没有收到
      BSF   STATUS,RP0          BCF    STATUS,RP0
      MOVLW 0X30          MOVF   SSPBUF,W
      MOVWF TRISC          ANDLW  B11000000    ;保留有效位
      BCF   STATUS,RP0          MOVWF  REG2    ;低 2 位送 REG2
      BCF   SSPCON,SSPEN      BCF   STATUS,C    ;进位位清零
      MOVLW 0X00    ;SPI 初始化          RLCF  REG2,1    ;数据调整
      MOVWF SSPCON          RLCF  REG1,1
      BSF   SSPCON,SSPEN ;SPI 开放          RLCF  REG2,1
      LOOP  CALL  ADCON          RLCF  REG1,1    ;低 8 位
      . . .          ;主程序省略          RLCF  REG2,1    ;高 2 位
      . . .          RETURN
    
```

收稿日期:2001-08-04

咨询编号:020120

; A/D 转换子程序,返回时数据低 8 位在 REG1 中,

●元器件快讯

用于背板及互连产品的 LVDS 技术

快捷半导体公司 (Fairchild Semiconductor International) 现已把低压差动信号 (Low Voltage Differential Signaling, LVDS) 技术用于其背板及互连产品。

LVDS 技术使用差动信号把速度很高的信号 (如 PC 板上的时钟及数据信号) 送到背板,或通过电话在不同的系统板之间传送。快捷公司的 LVDS 速度比其他 LVDS 技术快 30%, 传输速度可高达 622Mbps。同时可提供的共模范围 (common mode range) 也很宽,从而简化了 PC 板和系统的设计,并使其抗噪声性能和系统可靠性都有所提高。

快捷半导体公司最初的一批 LVDS 产品包括

FIN1017 信号驱动器、FIN1018 信号接收器、FIN1019 信号驱动器/接收器、FIN1027 双驱动器,以及 FIN1028 双接收器等。它们可在 3.3V 电源下工作,并有多种不同的位数结构。FIN1017 和 FIN1018 采用符合工业标准的 8 脚 SOIC 封装或全球最小的 8 脚封装 US8。FIN1019 采用 14 脚 SOIC 及 TSSOP 封装,而 FIN1027 及 FIN1028 则采用 8 脚 SOIC。

目前,FIN1017、FIN1018、FIN1019、FIN1027 及 FIN1028 均有现货。FIN1017 和 FIN1018 的单价为 0.63 美元;而 FIN1019、FIN1027 及 FIN1028 的单价则为 1.35 美元。

咨询编号:020121



2.7 V to 5.5 V, 2.3 μ s, 10-Bit ADC in 8-Lead microSOIC/DIP

AD7810

FEATURES

- 10-Bit ADC with 2.3 μ s Conversion Time
- Small Footprint 8-Lead microSOIC Package
- Specified Over a -40°C to $+105^{\circ}\text{C}$ Temperature Range
- Inherent Track-and-Hold Functionality
- Operating Supply Range: 2.7 V to 5.5 V
- Specifications at 2.7 V to 5.5 V
- Microcontroller-Compatible Serial Interface
- Optional Automatic Power-Down at End of Conversion
- Low Power Operation
 - 270 μ W at 10 kSPS Throughput Rate
 - 2.7 mW at 100 kSPS Throughput Rate
- Analog Input Range: 0 V to V_{REF}
- Reference Input Range: 0 V to V_{DD}

APPLICATIONS

- Low Power, Hand-Held Portable Applications that Require Analog-to-Digital Conversion with 10-Bit Accuracy; e.g., Battery Powered Test Equipment, Battery-Powered Communications Systems

GENERAL DESCRIPTION

The AD7810 is a high speed, low power, 10-bit A/D converter that operates from a single 2.7 V to 5.5 V supply. The part contains a 2.3 μ s successive approximation A/D converter, with inherent track/hold functionality, a pseudo differential input and a high speed serial interface that interfaces to most microcontrollers. The AD7810 is fully specified over a temperature range of -40°C to $+105^{\circ}\text{C}$.


By using a technique that samples the state of the $\overline{\text{CONVST}}$ (convert start) signal at the end of a conversion, the AD7810 may be used in an automatic power-down mode. When used in this mode, the AD7810 automatically powers down at the end of a conversion and “wakes up” at the start of a new conversion. This feature significantly reduces the power consumption of the part at lower throughput rates. The AD7810 can also operate in a high speed mode where the part is not powered down between conversions. In this high speed mode of operation, the conversion time of the AD7810 is 2.3 μ s. The maximum throughput rate is dependent on the speed of the serial interface of the microcontroller.

The part is available in a small 8-lead, 0.3" wide, plastic dual-in-line package (mini-DIP); in an 8-lead, small outline IC (SOIC); and in an 8-lead microSOIC package.

REV. B

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

FUNCTIONAL BLOCK DIAGRAM

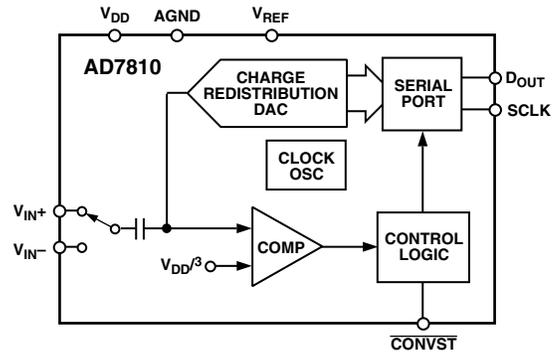

PRODUCT HIGHLIGHTS

1. Complete, 10-Bit ADC in 8-Lead Package
The AD7810 is a 10-bit 2.3 μ s ADC with inherent track/hold functionality and a high speed serial interface—all in an 8-lead microSOIC package. V_{REF} may be connected to V_{DD} to eliminate the need for an external reference. The result is a high speed, low power, space saving ADC solution.
2. Low Power, Single Supply Operation
The AD7810 operates from a single 2.7 V to 5.5 V supply and typically consumes only 9 mW of power while converting. The power dissipation can be significantly reduced at lower throughput rates by using the automatic power-down mode, e.g., at a throughput rate of 10 kSPS the power consumption is only 270 μ W.
3. Automatic Power-Down
The automatic power-down mode, whereby the AD7810 powers down at the end of a conversion and “wakes up” before the next conversion, means the AD7810 is ideal for battery powered applications. See Power vs. Throughput Rate section.
4. Serial Interface
An easy to use, fast serial interface allows connection to most popular microprocessors with no external circuitry.

AD7810—SPECIFICATIONS (GND = 0 V, V_{REF} = V_{DD}. All specifications –40°C to +105°C unless otherwise noted.)

Parameter	Y Version	Unit	Test Conditions/Comments
DYNAMIC PERFORMANCE			
Signal to (Noise + Distortion) Ratio ¹	58	dB min	f _{IN} = 30 kHz, f _{SAMPLE} = 350 kHz
Total Harmonic Distortion ¹	–64	dB max	
Peak Harmonic or Spurious Noise	–64	dB max	
Intermodulation Distortion ²			f _a = 48 kHz, f _b = 48.5 kHz
2nd Order Terms	–67	dB typ	
3rd Order Terms	–67	dB typ	
DC ACCURACY			
Resolution	10	Bits	
Relative Accuracy ¹	±1	LSB max	
Differential Nonlinearity (DNL) ¹	±1	LSB max	
Offset Error ¹	±2	LSB max	
Gain Error ¹	±2	LSB max	
Minimum Resolution for Which No Missing Codes Are Guaranteed	10	Bits	
ANALOG INPUT			
Input Voltage Range	0 V _{REF}	V min V max	
Input Leakage Current ²	±1	μA max	
Input Capacitance ²	15	pF max	
REFERENCE INPUTS²			
V _{REF} Input Voltage Range	1.2 V _{DD}	V min V max	
Input Leakage Current	±3	μA max	
Input Capacitance	20	pF max	
LOGIC INPUTS²			
V _{INH} , Input High Voltage	2.0	V min	
V _{INL} , Input Low Voltage	0.4	V max	
Input Current, I _{IN}	±1	μA max	Typically 10 nA, V _{IN} = 0 V to V _{DD}
Input Capacitance, C _{IN}	8	pF max	
LOGIC OUTPUTS			
Output High Voltage, V _{OH}	2.4	V min	I _{SOURCE} = 200 μA
Output Low Voltage, V _{OL}	0.4	V max	I _{SINK} = 200 μA
High Impedance Leakage Current	±10	μA max	
High Impedance Capacitance	15	pF max	
CONVERSION RATE			
Conversion Time	2.3	μs max	
Track/Hold Acquisition Time ¹	100	ns max	See DC Acquisition Time Section
POWER SUPPLY			
V _{DD}	2.7–5.5	Volts	For Specified Performance
I _{DD}	3.5	mA max	Sampling at 350 kSPS and Logic
Power Dissipation	17.5	mW max	Inputs at V _{DD} or 0 V. V _{DD} = 5 V
Power-Down Mode			
I _{DD}	1	μA max	V _{DD} = 5 V; V _{DD} = 3 V
Power Dissipation	5	μW max	
Automatic Power Down			
1 kSPS Throughput	27	μW max	
10 kSPS Throughput	270	μW max	
100 kSPS Throughput	2.7	mW max	

NOTES

¹See Terminology section.

²Sample tested during initial release and after any redesign or process change that may affect this parameter.

Specifications subject to change without notice.

Timing Characteristics^{1, 2} (-40°C to +105°C, V_{REF} = V_{DD}, unless otherwise noted)

Parameter	V _{DD} = 5 V ± 10%	V _{DD} = 3 V ± 10%	Unit	Conditions/Comments
t ₁	2.3	2.3	µs (max)	Conversion Time Mode 1 Operation (High Speed Mode)
t ₂	20	20	ns (min)	$\overline{\text{CONVST}}$ Pulsewidth
t ₃	25	25	ns (min)	SCLK High Pulsewidth
t ₄	25	25	ns (min)	SCLK Low Pulsewidth
t ₅ ³	5	5	ns (min)	$\overline{\text{CONVST}}$ Rising Edge to SCLK Rising Edge Set-Up Time
t ₆ ³	10	10	ns (max)	SCLK Rising Edge to D _{OUT} Data Valid Delay
t ₇ ³	5	5	ns (max)	Data Hold Time after Rising Edge SCLK
t ₈ ^{3, 4}	20	20	ns (max)	Bus Relinquish Time after Falling Edge of SCLK
t _{POWER UP}	10	10	ns (min)	
t _{POWER UP}	1.5	1.5	µs (max)	Power-Up Time after Rising Edge of $\overline{\text{CONVST}}$

NOTES

¹Sample tested to ensure compliance.

²See Figures 14, 15 and 16.

³These numbers are measured with the load circuit of Figure 1. They are defined as the time required for the o/p to cross 0.8 V or 2.4 V for V_{DD} = 5 V ± 10% and 0.4 V or 2 V for V_{DD} = 3 V ± 10%.

⁴Derived from the measured time taken by the data outputs to change 0.5 V when loaded with the circuit of Figure 1. The measured number is then extrapolated back to remove the effects of charging or discharging the 50 pF capacitor. This means that the time, t₈, quoted in the Timing Characteristics is the true bus relinquish time of the part and as such is independent of external bus loading capacitances.

Specifications subject to change without notice.

ABSOLUTE MAXIMUM RATINGS*

(T_A = 25°C unless otherwise noted)

V _{DD} to GND	-0.3 V to +7 V
Digital Input Voltage to GND ($\overline{\text{CONVST}}$, SCLK)	-0.3 V, V _{DD} + 0.3 V
Digital Output Voltage to GND (D _{OUT})	-0.3 V, V _{DD} + 0.3 V
V _{REF} to GND	-0.3 V, V _{DD} + 0.3 V
Analog Inputs (V _{IN+} , V _{IN-})	-0.3 V, V _{DD} + 0.3 V
Storage Temperature Range	-65°C to +150°C
Junction Temperature	150°C
Plastic DIP Package, Power Dissipation	450 mW
θ _{JA} Thermal Impedance	125°C/W
θ _{JC} Thermal Impedance	50°C/W
Lead Temperature Soldering (10 sec)	260°C

SOIC Package, Power Dissipation	450 mW
θ _{JA} Thermal Impedance	160°C/W
θ _{JC} Thermal Impedance	56°C/W
Lead Temperature, Soldering	
Vapor Phase (60 sec)	215°C
Infrared (15 sec)	220°C
MicroSOIC Package, Power Dissipation	450 mW
θ _{JA} Thermal Impedance	206°C/W
θ _{JC} Thermal Impedance	44°C/W
Lead Temperature, Soldering	
Vapor Phase (60 sec)	215°C
Infrared (15 sec)	220°C

*Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those listed in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ORDERING GUIDE

Model	Linearity Error (LSB)	Temperature Range	Package Description	Package Options	Branding Information
AD7810YN	±1 LSB	-40°C to +105°C	Plastic DIP	N-8	C1Y
AD7810YR	±1 LSB	-40°C to +105°C	Small Outline IC (SOIC)	SO-8	
AD7810YRM	±1 LSB	-40°C to +105°C	microSOIC	RM-8	

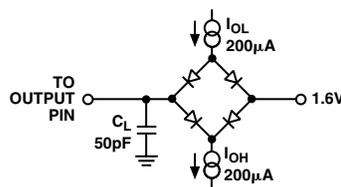



Figure 1. Load Circuit for Digital Output Timing Specifications

AD7810

PIN FUNCTION DESCRIPTIONS

Pin No.	Mnemonic	Description
1	$\overline{\text{CONVST}}$	Convert Start. Falling edge puts the track-and-hold into hold mode and initiates a conversion. A rising edge on the $\overline{\text{CONVST}}$ pin enables the serial port of the AD7810. This is useful in multi-package applications where a number of devices share the same serial bus. The state of this pin at the end of conversion also determines whether the part is powered down or not. See Operating Modes section of this data sheet.
2	$V_{\text{IN}+}$	Positive input of the pseudo differential analog input.
3	$V_{\text{IN}-}$	Negative input of the pseudo differential analog input.
4	GND	Ground reference for analog and digital circuitry.
5	V_{REF}	External reference is connected here.
6	D_{OUT}	Serial data is shifted out on this pin.
7	SCLK	Serial Clock. An external serial clock is applied here.
8	V_{DD}	Positive Supply Voltage 2.7 V to 5.5 V.

PIN CONFIGURATION DIP/SOIC

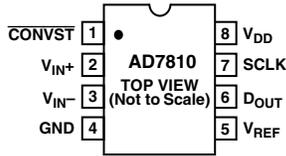

Typical Performance Characteristics

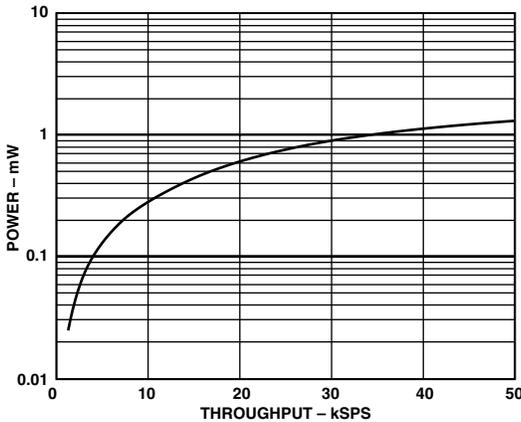


Figure 2. Power vs. Throughput

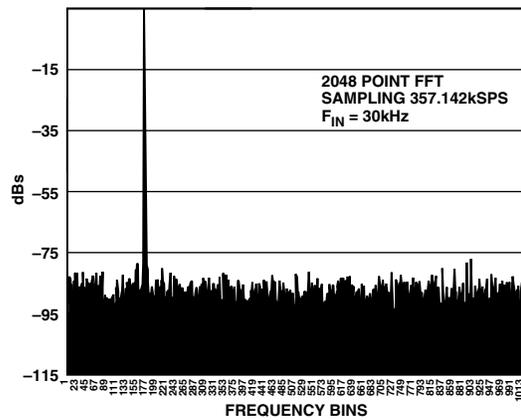


Figure 3. AD7810 SNR

TERMINOLOGY**Signal to (Noise + Distortion) Ratio**

This is the measured ratio of signal to (noise + distortion) at the output of the A/D converter. The signal is the rms amplitude of the fundamental. Noise is the rms sum of all nonfundamental signals up to half the sampling frequency ($f_s/2$), excluding dc. The ratio is dependent upon the number of quantization levels in the digitization process; the more levels, the smaller the quantization noise. The theoretical signal to (noise + distortion) ratio for an ideal N-bit converter with a sine wave input is given by:

$$\text{Signal to (Noise + Distortion)} = (6.02N + 1.76) \text{ dB}$$

Thus for a 10-bit converter, this is 62 dB.

Total Harmonic Distortion

Total harmonic distortion (THD) is the ratio of the rms sum of harmonics to the fundamental. For the AD7810 it is defined as:

$$\text{THD}(\text{dB}) = 20 \log \frac{\sqrt{V_2^2 + V_3^2 + V_4^2 + V_5^2}}{V_1}$$

where V_1 is the rms amplitude of the fundamental and V_2, V_3, V_4, V_5 and V_6^2 are the rms amplitudes of the second through the sixth harmonics.

Peak Harmonic or Spurious Noise

Peak harmonic or spurious noise is defined as the ratio of the rms values of the next largest component in the ADC output spectrum (up to $f_s/2$ and excluding dc) to the rms value of the fundamental. Normally, the value of this specification is determined by the largest harmonic in the spectrum, but for parts where the harmonics are buried in the noise floor, it will be a noise peak.

Intermodulation Distortion

With inputs consisting of sine waves at two frequencies, f_a and f_b , any active device with nonlinearities will create distortion products at sum and difference frequencies of $m f_a \pm n f_b$ where $m, n = 0, 1, 2, 3$, etc. Intermodulation terms are those for which neither m nor n are equal to zero. For example, the second order terms include $(f_a + f_b)$ and $(f_a - f_b)$, while the third order terms include $(2f_a + f_b)$, $(2f_a - f_b)$, $(f_a + 2f_b)$ and $(f_a - 2f_b)$.

The AD7810 is tested using the CCIF standard where two input frequencies near the top end of the input bandwidth are used. In this case, the second and third order terms are of different significance. The second order terms are usually distanced in frequency from the original sine waves while the third order terms are usually at a frequency close to the input frequencies. As a result, the second and third order terms are specified separately. The calculation of the intermodulation distortion is as per the THD specification where it is the ratio of the rms sum of the individual distortion products to the rms amplitude of the fundamental expressed in dBs.

Relative Accuracy

Relative accuracy or endpoint nonlinearity is the maximum deviation from a straight line passing through the endpoints of the ADC transfer function.

Differential Nonlinearity

This is the difference between the measured and the ideal 1 LSB change between any two adjacent codes in the ADC.

Offset Error

This is the deviation of the first code transition (0000 . . . 000) to (0000 . . . 001) from the ideal, i.e., AGND + 1 LSB.

Gain Error

This is the deviation of the last code transition (1111 . . . 110) to (1111 . . . 111) from the ideal (i.e., $V_{REF} - 1$ LSB) after the offset error has been adjusted out.

Track/Hold Acquisition Time

Track/hold acquisition time is the time required for the output of the track/hold amplifier to reach its final value, within $\pm 1/2$ LSB, after the end of conversion (the point at which the track/hold returns to track mode). It also applies to situations where there is a step input change on the input voltage applied to the V_{IN+} input of the AD7810. It means that the user must wait for the duration of the track/hold acquisition time, after the end of conversion or after a step input change to V_{IN+} , before starting another conversion to ensure that the part operates to specification.

AD7810

CIRCUIT DESCRIPTION

Converter Operation

The AD7810 is a successive approximation analog-to-digital converter based around a charge redistribution DAC. The ADC can convert analog input signals in the range 0 V to V_{DD} . Figures 4 and 5 below show simplified schematics of the ADC. Figure 4 shows the ADC during its acquisition phase. SW2 is closed and SW1 is in Position A; the comparator is held in a balanced condition; and the sampling capacitor acquires the signal on V_{IN+} .

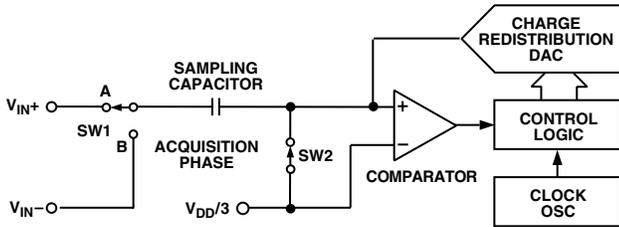


Figure 4. ADC Acquisition Phase

When the ADC starts a conversion (see Figure 5), SW2 will open and SW1 will move to Position B, causing the comparator to become unbalanced. The control logic and the charge redistribution DAC are used to add and subtract fixed amounts of charge from the sampling capacitor to bring the comparator back into a balanced condition. When the comparator is rebalanced, the conversion is complete. The control logic generates the ADC output code. Figure 11 shows the ADC transfer function.

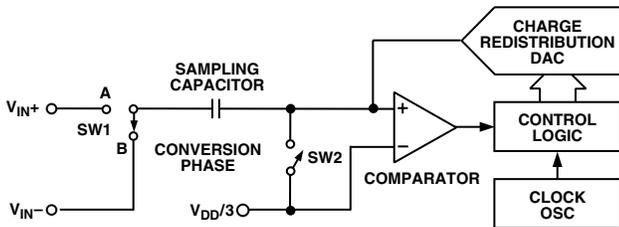


Figure 5. ADC Conversion Phase

TYPICAL CONNECTION DIAGRAM

Figure 6 shows a typical connection diagram for the AD7810. The serial interface is implemented using two wires; the rising edge of $\overline{\text{CONVST}}$ enables the serial interface—see Serial Interface section for more details. V_{REF} is connected to a well decoupled V_{DD} pin to provide an analog input range of 0 V to V_{DD} . When V_{DD} is first connected, the AD7810 powers up in a low current mode, i.e., power-down. A rising edge on the $\overline{\text{CONVST}}$ input will cause the part to power up—see Operating Modes. If power consumption is of concern, the automatic power-down at the end of a conversion should be used to improve power performance. See Power vs. Throughput Rate section of the data sheet.

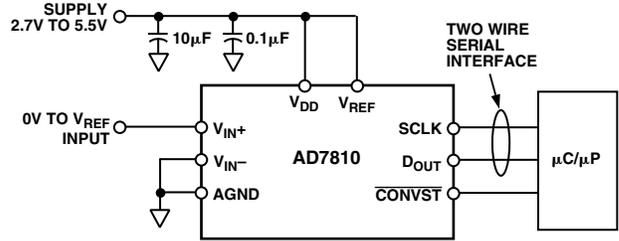


Figure 6. Typical Connection Diagram

Analog Input

Figure 7 shows an equivalent circuit of the analog input structure of the AD7810. The two diodes, D1 and D2, provide ESD protection for the analog inputs. Care must be taken to ensure that the analog input signal never exceeds the supply rails by more than 200 mV. This will cause these diodes to become forward biased and start conducting current into the substrate. The maximum current these diodes can conduct without causing irreversible damage to the part is 20 mA. The capacitor C2 is typically about 4 pF and can be primarily attributed to pin capacitance. The resistor R1 is a lumped component made up of the on resistance of a multiplexer and a switch. This resistor is typically about 125 Ω . The capacitor C1 is the ADC sampling capacitor and has a capacitance of 3.5 pF.

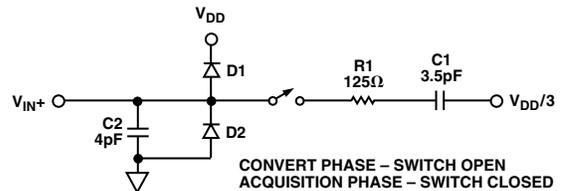


Figure 7. Equivalent Analog Input Circuit

The analog input of the AD7810 is made up of a pseudo differential pair. V_{IN+} pseudo differential with respect to V_{IN-} . The signal is applied to V_{IN+} , but in the pseudo differential scheme the sampling capacitor is connected to V_{IN-} during conversion (see Figure 8). This input scheme can be used to remove offsets that exist in a system. For example, if a system had an offset of 0.5 V, the offset could be applied to V_{IN-} and the signal applied to V_{IN+} . This has the effect of offsetting the input span by 0.5 V. It is only possible to offset the input span when the reference voltage (V_{REF}) is less than $V_{DD} - V_{OFFSET}$.

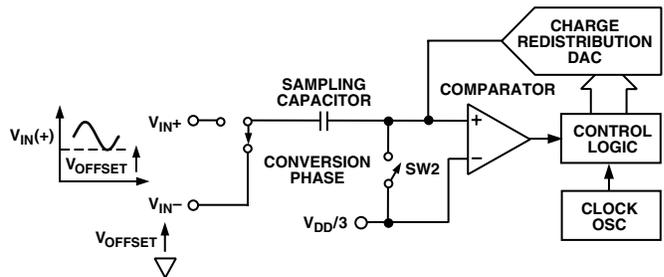


Figure 8. Pseudo Differential Input Scheme

When using the pseudo differential input scheme, the signal on V_{IN-} must not vary by more than a 1/2 LSB during the conversion process. If the signal on V_{IN-} varies during conversion, the conversion result will be incorrect. For single-ended operation, V_{IN-} is always connected to AGND. Figure 9 shows the AD7810 pseudo differential input being used to make a unipolar dc current measurement. A sense resistor is used to convert the current to a voltage and the voltage, is applied to the differential input as shown.

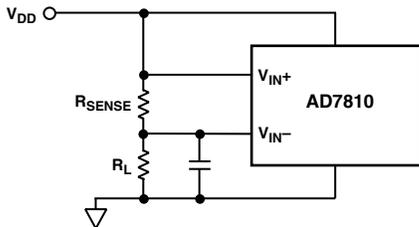


Figure 9. DC Current Measurement Scheme

DC Acquisition Time

The ADC starts a new acquisition phase at the end of a conversion and ends on the falling edge of the \overline{CONVST} signal. At the end of a conversion there is a settling time associated with the sampling circuit. This settling time lasts approximately 100 ns. The analog signal on V_{IN+} is also being acquired during this settling time; therefore, the minimum acquisition time needed is approximately 100 ns.

Figure 10 shows the equivalent charging circuit for the sampling capacitor when the ADC is in its acquisition phase. R_2 represents the source impedance of a buffer amplifier or resistive network; R_1 is an internal multiplexer resistance and C_1 is the sampling capacitor.

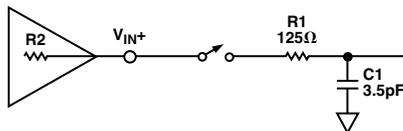


Figure 10. Equivalent Sampling Circuit

During the acquisition phase, the sampling capacitor must be charged to within a 1/2 LSB of its final value. The time it takes to charge the sampling capacitor (t_{CHARGE}) is given by the following formula:

$$t_{CHARGE} = 7.6 \times (R_2 + 125 \Omega) \times 3.5 pF$$

For small values of source impedance, the settling time associated with the sampling circuit (100 ns) is, in effect, the acquisition time of the ADC. For example, with a source impedance (R_2) of 10 Ω , the charge time for the sampling capacitor is approximately 4 ns. The charge time becomes significant for source impedances of 2 k Ω and greater.

AC Acquisition Time

In ac applications it is recommended to always buffer analog input signals. The source impedance of the drive circuitry must be kept as low as possible to minimize the acquisition time of the ADC. Large values of source impedance will cause the THD to degrade at high throughput rates. In addition, better performance can generally be achieved by using an external 1 nF capacitor on V_{IN+} .

ADC TRANSFER FUNCTION

The output coding of the AD7810 is straight binary. The designed code transitions occur at successive integer LSB values (i.e., 1 LSB, 2 LSBs, etc.). The LSB size is = $V_{REF}/1024$. The ideal transfer characteristic for the AD7810 is shown in Figure 11 below.

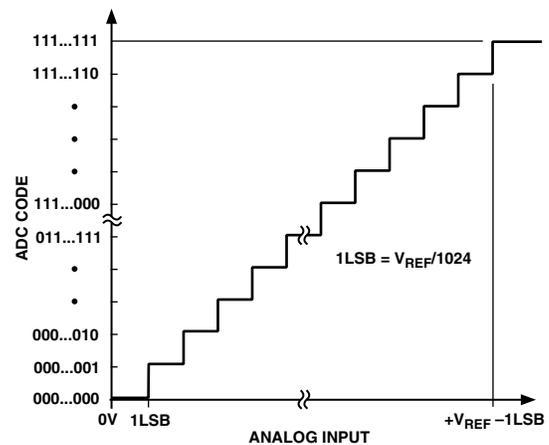


Figure 11. Transfer Characteristic

AD7810

POWER-UP TIMES

The AD7810 has a 1.5 μs power-up time. When V_{DD} is first connected, the AD7810 is in a low current mode of operation. In order to carry out a conversion, the AD7810 must first be powered up. The ADC is powered up by a rising edge on the $\overline{\text{CONVST}}$ pin. A conversion is initiated on the falling edge of $\overline{\text{CONVST}}$. Figure 12 shows how to power up the AD7810 when V_{DD} is first connected or after the AD7810 is powered down using the $\overline{\text{CONVST}}$ pin.

Care must be taken to ensure that the $\overline{\text{CONVST}}$ pin of the AD7810 is logic low when V_{DD} is first applied.

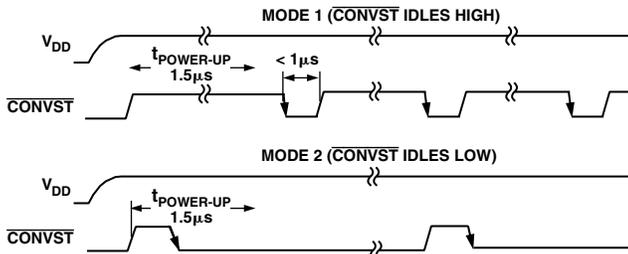


Figure 12. Power-Up Times

POWER VS. THROUGHPUT RATE

By operating the AD7810 in Mode 2, the average power consumption of the AD7810 decreases at lower throughput rates. Figure 13 shows how the automatic power-down is implemented using the $\overline{\text{CONVST}}$ signal to achieve the optimum power performance for the AD7810. As the throughput rate is reduced, the device remains in its power-down state longer and the average power consumption over time drops accordingly.

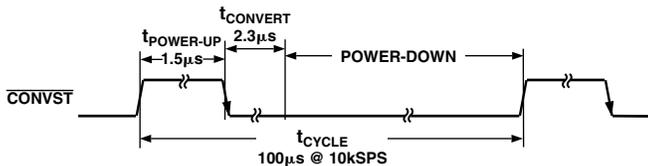


Figure 13. Automatic Power-Down

For example, if the AD7810 is operated in a continuous sampling mode with a throughput rate of 10 kSPS, the power consumption is calculated as follows. The power dissipation during normal operation is 9 mW, $V_{DD} = 3\text{ V}$. If the power-up time is 1.5 μs and the conversion time is 2.3 μs , the AD7810 can be said to dissipate 9 mW for 3.8 μs (worst case) during each conversion cycle. If the throughput rate is 10 kSPS, the cycle time is 100 μs and the average power dissipated during each cycle is $(3.8/100) \times (9\text{ mW}) = 342\text{ }\mu\text{W}$. Figure 2 shows a graph of Power vs. Throughput.

OPERATING MODES

Mode 1 Operation (High Speed Sampling)

When the AD7810 is used in this mode of operation, the part is not powered down between conversions. This mode of operation allows high throughput rates to be achieved. The timing diagram in Figure 14 shows how this optimum throughput rate is achieved by bringing the $\overline{\text{CONVST}}$ signal high before the end of the conversion. The AD7810 leaves its tracking mode and goes into hold on the falling edge of $\overline{\text{CONVST}}$. A conversion is also initiated at this time. The conversion takes 2.3 μs to complete. At this point, the result of the current conversion is latched into the serial shift register, and the state of the $\overline{\text{CONVST}}$ signal checked. The $\overline{\text{CONVST}}$ signal should be high at the end of the conversion to prevent the part from powering down.

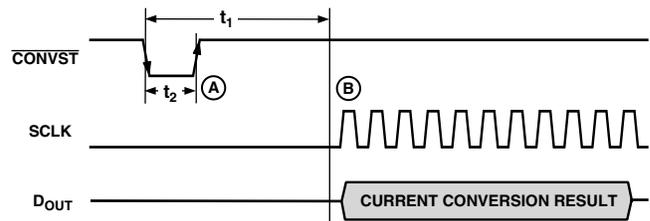


Figure 14. Mode 1 Operation Timing

The serial port on the AD7810 is enabled on the rising edge of the $\overline{\text{CONVST}}$ signal (see Serial Interface section). As explained earlier, this rising edge should occur before the end of the conversion process if the part is not to be powered down. A serial read can take place at any stage after the rising edge of $\overline{\text{CONVST}}$. If a serial read is initiated before the end of the current conversion process (i.e., at time "A"), the result of the previous conversion is shifted out on the D_{OUT} pin. It is possible to allow the serial read to extend beyond the end of a conversion. In this case the new data will not be latched into the output shift register until the read has finished. The dynamic performance of the AD7810 typically degrades by up to 3 dBs while reading during a conversion. If the user waits until the end of the conversion process, i.e., 2.3 μs after falling edge of $\overline{\text{CONVST}}$ (Point "B"), before initiating a read, the current conversion result is shifted out.

Mode 2 Operation (Automatic Power-Down)

When used in this mode of operation, the part automatically powers down at the end of a conversion. This is achieved by leaving the $\overline{\text{CONVST}}$ signal low until the end of the conversion. Because it takes approximately 1.5 μs for the part to power up after it has been powered down, this mode of operation is intended to be used in applications where slower throughput rates are required, i.e., in the order of 100 kSPS. The timing diagram in Figure 15 shows how to operate the part in this mode. If the AD7810 is powered down, the rising edge of the $\overline{\text{CONVST}}$ pulse causes the part to power up. When the part has powered up ($\approx 1.5 \mu\text{s}$ after the rising edge of $\overline{\text{CONVST}}$), the $\overline{\text{CONVST}}$ signal is brought low, and a conversion is initiated on this falling edge of the $\overline{\text{CONVST}}$ signal. The conversion takes 2.3 μs and after this time, the conversion result is latched into the serial shift register and the part powers down. Therefore, when the part is operated in Mode 2, the effective conversion time is equal to the power-up time (1.5 μs) and the SAR conversion time (2.3 μs).

NOTE: Although the AD7810 takes 1.5 μs to power up after the rising edge of $\overline{\text{CONVST}}$, it is not necessary to leave $\overline{\text{CONVST}}$ high for 1.5 μs after the rising edge before bringing it low to initiate a conversion. If the $\overline{\text{CONVST}}$ signal goes low before 1.5 μs in time has elapsed, then the power-up time is timed out internally and a conversion is then initiated. Hence the AD7810 is guaranteed to have always powered up before a conversion is initiated—even if the $\overline{\text{CONVST}}$ pulsewidth is $< 1.5 \mu\text{s}$. If the $\overline{\text{CONVST}}$ width is $> 1.5 \mu\text{s}$, then a conversion is initiated on the falling edge.

As in the case of Mode 1 operation, the rising edge of the $\overline{\text{CONVST}}$ pulse enables the serial port of the AD7810 (see Serial Interface section). If a serial read is initiated soon after this rising edge (Point “A”), i.e., before the end of the conversion, the result of the previous conversion is shifted out on pin D_{OUT} . In order to read the result of the current conversion, the user must wait at least 2.3 μs after the falling edge of $\overline{\text{CONVST}}$

before initiating a serial read. The serial port of the AD7810 is still functional even though the AD7810 has been powered down. NOTE: Serial read should not cross the next rising edge of $\overline{\text{CONVST}}$.

Because it is possible to do a serial read from the part while it is powered down, the AD7810 is powered up only to do the conversion and is immediately powered down at the end of a conversion. This significantly improves the power consumption of the part at slower throughput rates—see Power vs. Throughput Rate section.

SERIAL INTERFACE

The serial interface of the AD7810 consists of three wires, a serial clock input SCLK, serial port enable $\overline{\text{CONVST}}$ and a serial data output D_{OUT} (see Figure 16). The serial interface is designed to allow easy interfacing to most microcontrollers, e.g., PIC16C, PIC17C, QSPI and SPI, without the need for any gluing logic. When interfacing to the 8051, the SCLK must be inverted. The Microprocessor Interface section explains how to interface to some popular microcontrollers.

Figure 16 shows the timing diagram for a serial read from the AD7810. The serial interface works with both a continuous and a noncontinuous serial clock. The rising edge of the $\overline{\text{CONVST}}$ signal resets a counter, which counts the number of serial clocks to ensure the correct number of bits are shifted out of the serial shift registers. The SCLK is ignored once the correct number of bits have been shifted out. In order for another serial transfer to take place, the counter must be reset by the falling edge of the 10th SCLK. Data is clocked out from the D_{OUT} line on the first rising SCLK edge after the rising edge of the $\overline{\text{CONVST}}$ signal and on subsequent SCLK rising edges. D_{OUT} enters its high impedance state again on the falling edge of the 10th SCLK. In multipackage applications, the $\overline{\text{CONVST}}$ signal can be used as a chip select signal. The serial interface will not shift data out until it receives a rising edge on the $\overline{\text{CONVST}}$ pin.

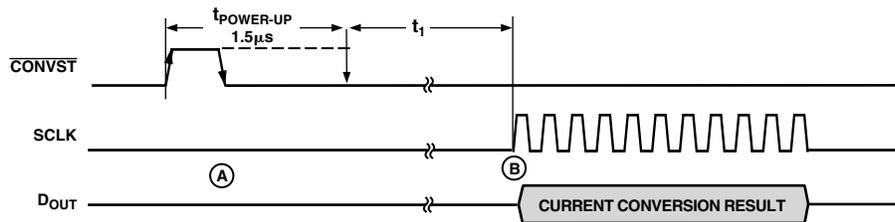


Figure 15. Mode 2 Operation Timing

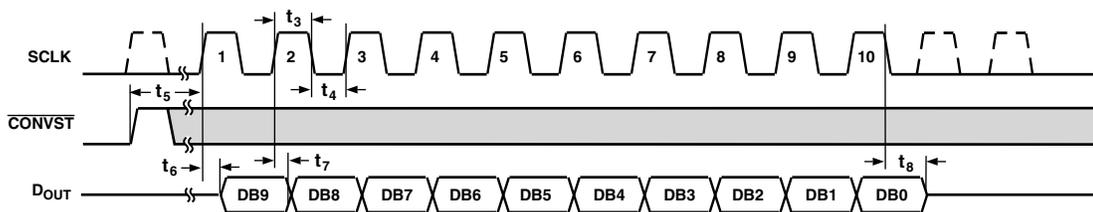


Figure 16. AD7810 Serial Interface Timing

AD7810

MICROPROCESSOR INTERFACING

The serial interface on the AD7810 allows the parts to be directly connected to a range of many different microprocessors. This section explains how to interface the AD7810 with some of the more common microcontroller serial interface protocols.

AD7810 to PIC16C6x/7x

The PIC16C6x Synchronous Serial Port (SSP) is configured as an SPI Master with the Clock Polarity Bit = 0. This is done by writing to the Synchronous Serial Port Control Register (SSPCON). See *PIC16/17 Microcontroller User Manual*. Figure 17 shows the hardware connections needed to interface to the PIC16/PIC17. In this example I/O port RA1 is being used to pulse $\overline{\text{CONVST}}$ and enable the serial port of the AD7810. This microcontroller transfers only eight bits of data during each serial transfer operation, therefore, two consecutive read operations are needed.

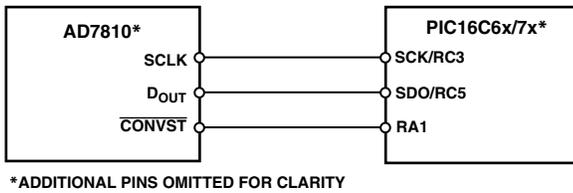


Figure 17. Interfacing to the PIC16/PIC17

AD7810 to MC68HC11

The Serial Peripheral Interface (SPI) on the MC68HC11 is configured for Master Mode (MSTR = 0), Clock Polarity Bit (CPOL) = 0, and the Clock Phase Bit (CPHA) = 1. The SPI is configured by writing to the SPI Control Register (SPCR)—see *68HC11 User Manual*. A connection diagram is shown in Figure 18.

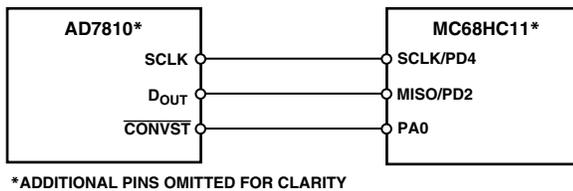


Figure 18. Interfacing to the MC68HC11

AD7810 to 8051

The AD7810 requires a clock synchronized to the serial data; therefore, the 8051 serial interface must be operated in Mode 0. In this mode serial data enters and exits through RXD, and a serial clock is output on TXD (half duplex). Figure 19 shows how the 8051 is connected to the AD7810. However, because the AD7810 shifts data out on the rising edge of the serial clock, the serial clock must be inverted.

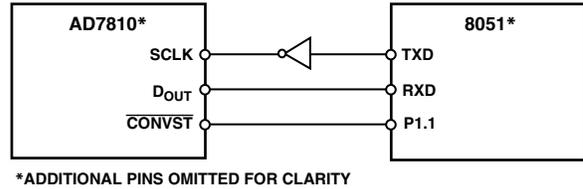


Figure 19. Interfacing to the 8051 Serial Port

It is possible to implement a serial interface using the data ports on the 8051 (or any microcontroller). This would allow direct interfacing between the AD7810 and 8051 to be implemented. The technique involves “bit banging” an I/O port (e.g., P1.0) to generate a serial clock and using another I/O port (e.g., P1.1) to read in data, see Figure 20.


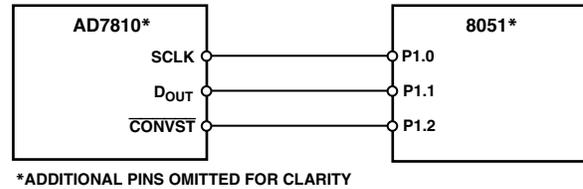


Figure 20. Interfacing to the 8051 Using I/O Ports


OUTLINE DIMENSIONS

Dimensions shown in inches and (mm).


8-Lead Plastic DIP
(N-8)

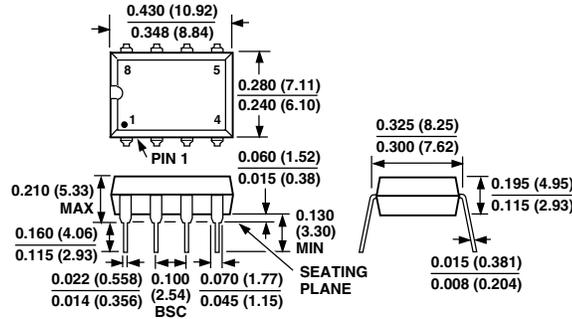

8-Lead Small Outline
(SO-8)

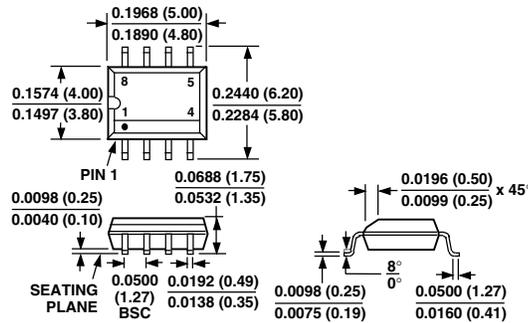

8-Lead microSOIC
(RM-8)

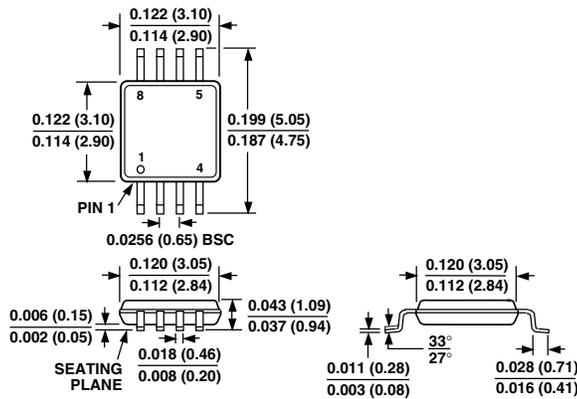

C01311a-0-10/00 (rev. B)

PRINTED IN U.S.A.