

MITSUBISHI <ANALOG ASSP>  
**M5T494P, FP, GP**

**SWITCHING REGULATOR CONTROL**

**DESCRIPTION**

The M5T494 is a monolithic IC designed for a pulse-width-modulation control circuit.

It contains all functions necessary to control single-ended or push-pull switching power supplies. It employs an on-chip 5-volt regulator, two error amplifiers, an adjustable oscillator, a dead-time control comparator, a pulse-steering flip-flop, output-control circuitry and an undervoltage-lockout (UVLO) function.

The UVLO prevents irregular operation at the IC outputs when the IC supply voltage is excessively low.

**FEATURES**



- Undervoltage lockout (inhibits output for low  $V_{CC}$ )
- Built-in 5-volt reference regulator  
 . . . . . (Reference voltage  $5V \pm 5\%$ )
- Output control selectable for single-ended or push-pull operation.
- Uncommitted outputs for 200-mA sink or source.

**APPLICATION**

Switching voltage regulators, Step-up step-down regulators, Voltage inversion regulators.

**RECOMMENDED OPERATING CONDITIONS**

- Supply voltage range . . . . . 7 ~ 40V  
 Pin 3 sink current . . . . . Less than 0.3mA  
 Timing capacitor,  $C_T$  . . . . . 470pF ~ 3.3 $\mu$ F  
 Timing resistor,  $R_T$  . . . . . 1.8 ~ 500k $\Omega$   
 Oscillator frequency . . . . . Lower than 300kHz

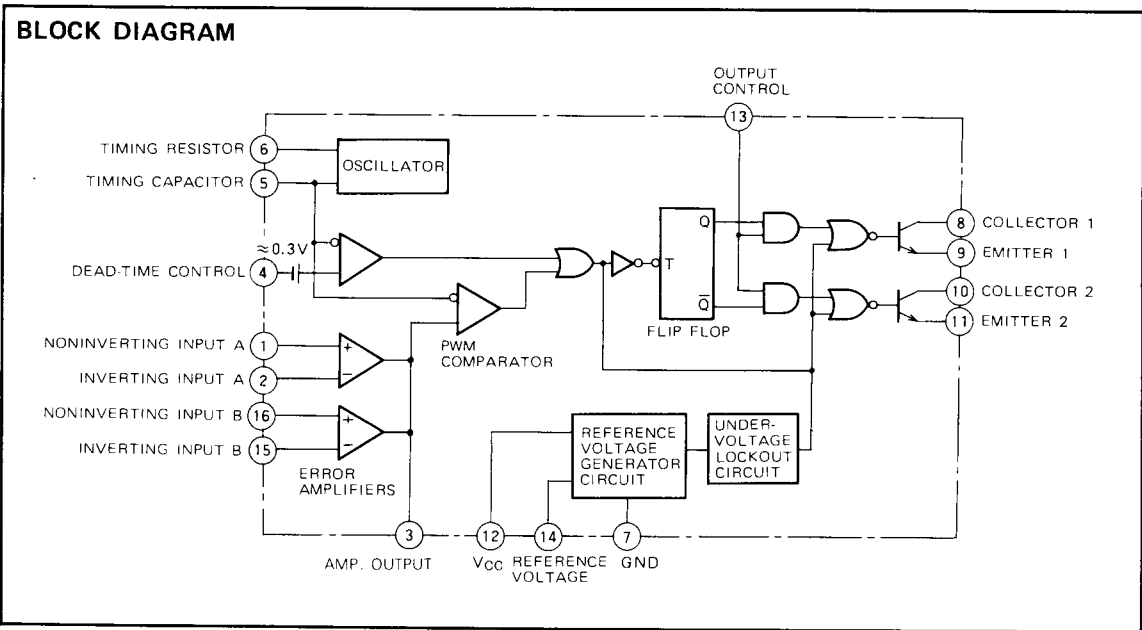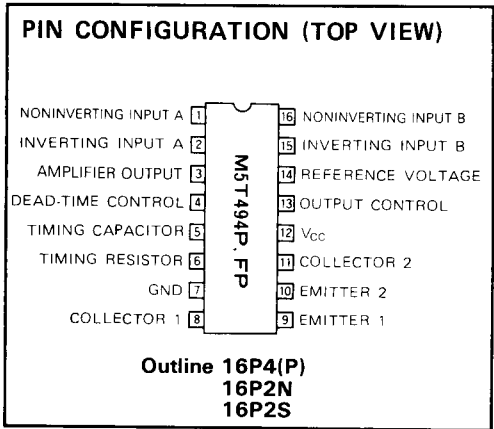

**SWITCHING REGULATOR CONTROL**

**ABSOLUTE MAXIMUM RATINGS** (Ta = 25°C, unless otherwise noted)

Symbol	Parameter	Conditions	Limits	Unit
V <sub>CC</sub>	Supply voltage		41	V
V <sub>ICM</sub>	common input voltage		-0.3 ~ V <sub>CC</sub>	V
V <sub>ID</sub>	Differential input voltage		V <sub>CC</sub>	V
V <sub>O</sub>	Output voltage		41	V
I <sub>O</sub>	Output current		200	mA
V <sub>I③</sub>	Input voltage		-0.3 ~ V <sub>I③</sub> + 0.3	V
P <sub>d</sub>	Power dissipation		1000(P)/800(FP)/550(GP)	mW
K <sub>θ</sub>	Thermal derating	T <sub>a</sub> ≥ 25°C	8(P)/6.4(FP)/4.4(GP)	mW/°C
T <sub>opr</sub>	Operating temperature		-20 ~ +85	°C
T <sub>stg</sub>	Storage temperature		-40 ~ +125	°C

**ELECTRICAL CHARACTERISTICS** (V<sub>CC</sub> = 15V, f<sub>osc</sub> = 40 kHz, Ta = -20 ~ +70°C, unless otherwise noted)


Symbol	Block	Parameter	Test conditions	Limits			Unit
				Min	Typ	Max	
V <sub>ref</sub>	REFERENCE	Output voltage	I <sub>ref</sub> = -1mA, T <sub>J</sub> = 25°C	4.75	5	5.25	V
ΔV <sub>refIN</sub>		Input regulation	V <sub>CC</sub> = 7 ~ 40V, I <sub>ref</sub> = -1mA, T <sub>J</sub> = 25°C		1	10	mV
ΔV <sub>refL</sub>		Load regulation	I <sub>ref</sub> = -1 ~ -10mA, T <sub>J</sub> = 25°C		2	20	mV
ΔV <sub>ref/ΔT<sub>a</sub></sub>		Temperature coefficient output voltage	T <sub>a</sub> = -20 + 85°C, I <sub>ref</sub> = -1mA		0.01	0.03	%/°C
I <sub>s</sub>	OSCILLATOR	Short circuit current	V <sub>ref</sub> = 0	-50	-30	-15	mA
f <sub>osc</sub>		Frequency	C <sub>T</sub> = 4700pF, R <sub>T</sub> = 6.2kΩ	37	41	45	kHz
Δf/f <sub>s</sub>		Standard deviation of frequency	V <sub>CC</sub> = 7 ~ 40V, T <sub>a</sub> = 25°C, C <sub>T</sub> , R <sub>T</sub>		10		%
Δf/f <sub>IN</sub>		Frequency change with voltage	V <sub>CC</sub> = 7 ~ 40V, T <sub>a</sub> = 25°C, C <sub>T</sub> = 4700pF, R <sub>T</sub> = 6.2kΩ		0.5	1.5	%
Δf/f <sub>T<sub>a</sub></sub>	Frequency change with temperature	T <sub>a</sub> = 0 ~ 70°C, C <sub>T</sub> = 4700pF, R <sub>T</sub> = 6.2kΩ		1	2	%	
I <sub>I④</sub>	DEAD-TIME CONTROL	Input bias current	V <sub>I④</sub> = 0 ~ 5.25V	-7	-0.7		μA
D <sub>MAX</sub>		Maximum duty cycle (each output)	V <sub>I④</sub> = 0V	42	45	48	%
V <sub>I④TH1</sub>		Input threshold voltage 1	Zero duty cycle (each output)		2.45	2.80	V
V <sub>I④TH2</sub>		Input threshold voltage 2	Maximum duty cycle (each output)		0		V
V <sub>AMPIO</sub>	ERROR AMPLIFIERS	Input offset voltage	V <sub>(3)</sub> = 2.5V		1	7	mV
I <sub>AMPIO</sub>		Input offset current	V <sub>(3)</sub> = 2.5V		5	200	nA
I <sub>AMPIB</sub>		Input bias current	V <sub>(3)</sub> = 2.5V	-700	-100		nA
V <sub>AMPICM</sub>		Common input voltage range	V <sub>CC</sub> = 7 ~ 40V	-0.3		V <sub>CC</sub> - 2	V
A <sub>v</sub>		Open loop voltage gain	V <sub>(3)</sub> = 0.5 ~ 3.5V, T <sub>a</sub> = 25°C	70	110		dB
f <sub>T</sub>		Gain bandwidth product	T <sub>a</sub> = 25°C	500	900		kHz
CMRR		Common mode rejection ratio	V <sub>CC</sub> = 40V, T <sub>a</sub> = 25°C	65	85		dB
I <sub>I③SINK</sub>		Output sink current	V <sub>(3)</sub> = 0.7V	0.3	0.7		mA
I <sub>I③SOURCE</sub>		Output source current	V <sub>(3)</sub> = 3.5V		-10	-2	mA
V <sub>I③RANGE</sub>		Output voltage range	"L" level		0.1	0.3	V
	"H" level		I <sub>(3)</sub> = 0	4.2	4.9	V	
V <sub>I③TH</sub>	PWM COMPARATOR	Input threshold voltage	Zero duty cycle (each output)		3.4	3.8	V
I <sub>I③SINK</sub>		Input sink current	V <sub>(3)</sub> = 0.7V	0.3	0.7	mA	

**SWITCHING REGULATOR CONTROL**

**ELECTRICAL CHARACTERISTICS**


Symbol	Section	Parameter	Test conditions	Limits			Unit
				Min	Typ	Max	
$I_{CL}$	OUTPUT	Collector leak current	$V_{CE} = 40V, V_{CC} = 40V$ (Common-emitter)		0.01	100	$\mu A$
$I_{EL}$		Emitter leak current	$V_{CC} = V_C = 40V, V_E = 0$ (Emitter follower)	-100	-0.01		$\mu A$
$V_{CESAT}$		Output saturation voltage (Common-emitter)	$I_C = 200mA, V_E = 0$		0.95	1.3	V
$V_{CEON}$		Output saturation voltage (Emitter follower)	$I_E = -200mA, V_C = 15V$		1.6	2.5	V
$t_{r1}$		Output-voltage rise time	$V_{CC} = 15V, R_L = 150\Omega, I_C = 100mA,$ $T_a = 25^\circ C$ (Common-emitter)		80	200	ns
$t_{f1}$		Output-voltage fall time			30	100	ns
$t_{r2}$		Output-voltage rise time	$V_{CC} = V_C = 15V, R_L = 150\Omega, I_E =$ $-100mA, T_a = 25^\circ C$ (Emitter follower)		200	400	ns
$t_{f2}$		Output-voltage fall time			30	100	ns
$I_{i3}$		Output-control input current	$V_{i3} = V_{ref}$		270	550	1000
$V_{CCLO}$	UNDER VOLTAGE LOCK-OUT	Lockout voltage	Supply voltage at output cut-off	3.8	5	5.7	V
$\Delta V_{CCLO}$		Hysteresis		100	200	380	mV
$I_{CCSB}$	CIRCUIT CURRENT	Standby supply current	$V_{CC} = 15V$ All other inputs and outputs open		6.7	11.5	mA
$I_{CCBI}$		Average bias current	$V_{i4} = 2V,$		7.3	13	mA

**TEST CIRCUIT**

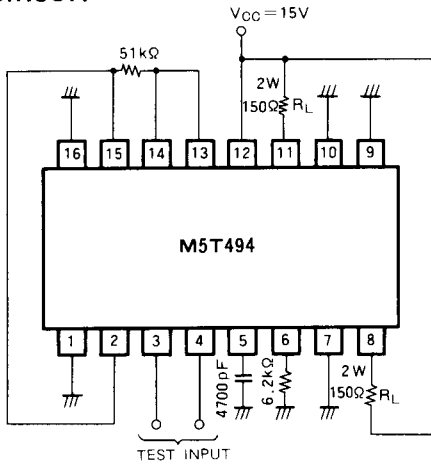


Note: To obtain output voltage from the emitter follower, connect pins ⑧ and ⑩ to  $V_{CC}$ , and connect each of pins ⑨ and ⑪ to ground through resistor  $R_L$ .


**THERMAL DERATING (MAXIMUM RATING)**

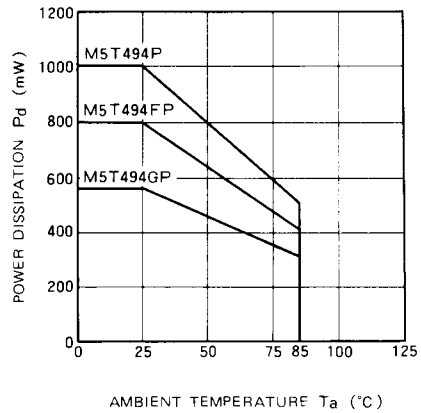

**UNDERVOLTAGE LOCKOUT CHARACTERISTICS**

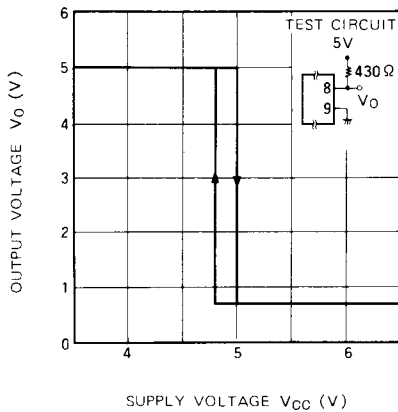


**LOCKOUT VOLTAGE VS AMBIENT TEMPERATURE**

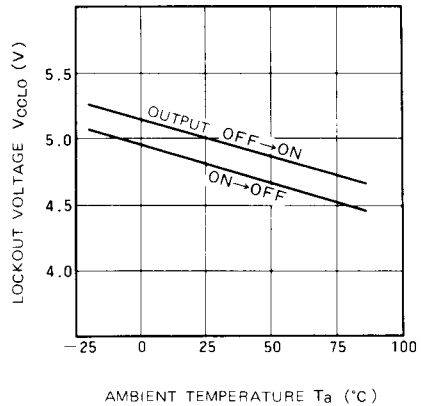


**SWITCHING REGULATOR CONTROL**


**REFERENCE VOLTAGE VS SUPPLY VOLTAGE**

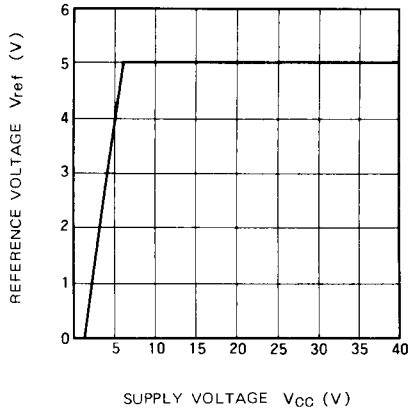


**OSCILLATOR FREQUENCY VS TIMING RESISTANCE**

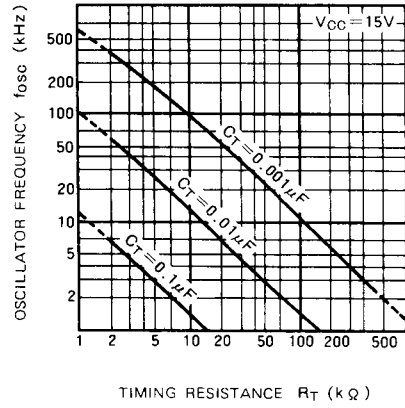


**OSCILLATOR FREQUENCY CHANGE VS AMBIENT TEMPERATURE**

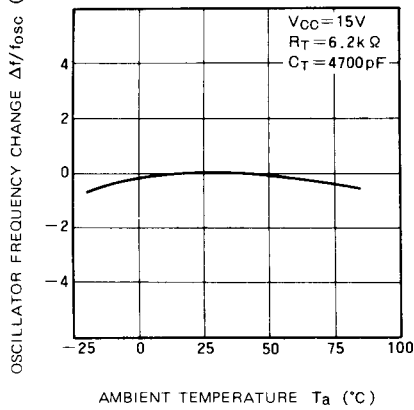


**REFERENCE VOLTAGE CHANGE VS AMBIENT TEMPERATURE**

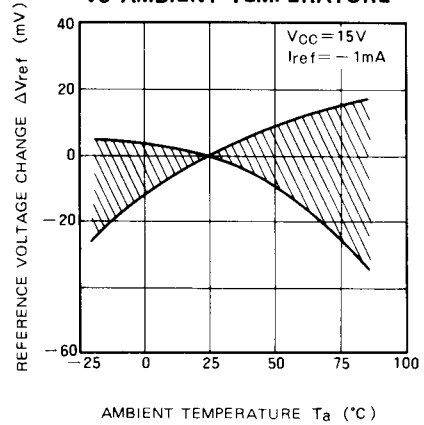



**OUTPUT DUTY CYCLE VS DEAD-TIME CONTROL INPUT VOLTAGE**

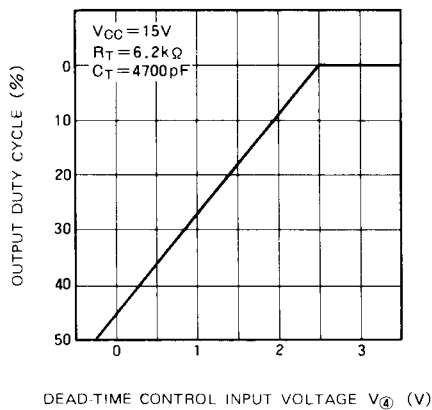


**ERROR AMP OPEN LOOP VOLTAGE GAIN VS FREQUENCY**

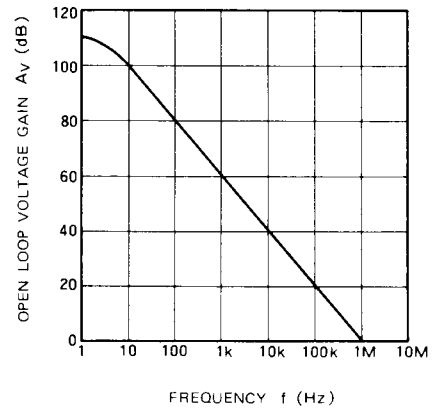

**SWITCHING REGULATOR CONTROL**

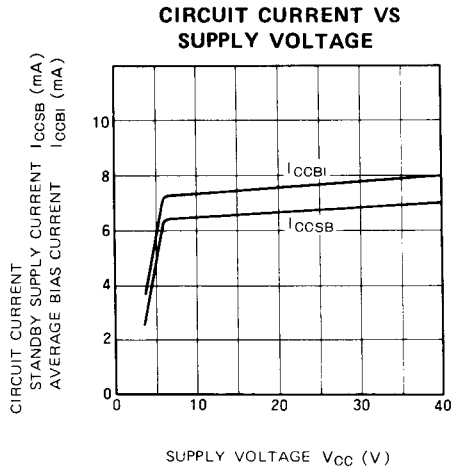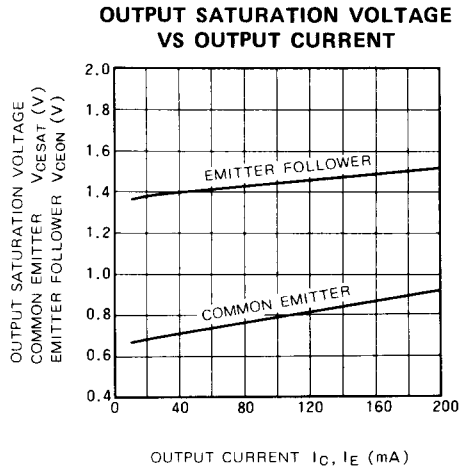

**VOLTAGE WAVEFORMS**

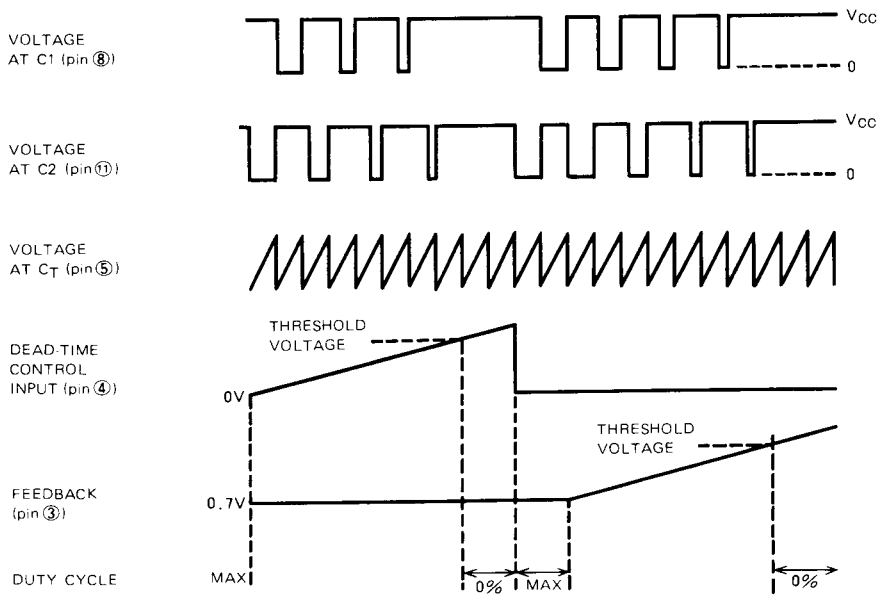

**FUNCTION TABLE**

OUTPUT CONTROL (pin 13)	OUTPUT FUNCTION
$V_{ref}$	Push-pull operation
GND	Single-ended or parallel operation