


VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED
HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,
USED, OR DISCLOSED IN WHOLE OR IN PART
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
02	RELEASED PER ECO 2321 JC	1/15/91	BJR
03	REDRAWN AND REVISED PER E980221 PEI	7/2/98	DPK

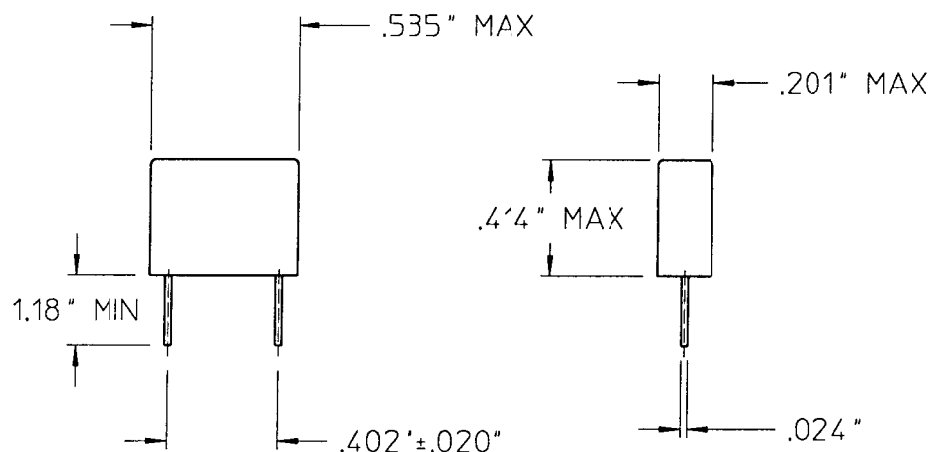

ORIGINAL
ONLY WHEN STAMPED
IN RED


ELECTRICAL SPECIFICATIONS

RATED VOLTAGE	250 VAC
CAPACITANCE	4700 pF
CAPACITANCE TOLERANCE	±20%
CLASS	Y CLASS
DISSIPATION FACTOR	1.3% @ 1kHz
DIELECTRIC VOLTAGE	2700 VDC
INSULATION RESISTANCE @ 500VDC	≥ 12000MΩ
RECOMMENDED VOLTAGE IN DC APPLICATION	≥ 1000 VDC
TEMPERATURE RANGE	-40 TO +85°C

NOTES:

1. APPROVALS INCLUDE SEMKO,
NEMKO, DEMKCO, EI, VDE, SEV,
OVE, IMQ, UL, CSA.

COPY

DRAWN BY	DATE				
	7/2/98				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES- TOLERANCES ARE: FRACTIONS DECIMALS ANGLES +1/64 .XX-+.01 .1° .XXX-+.005		CAPACITOR - (Y) 4700 pF ±20%, 250 VAC			
THIRD ANGLE PROJECTION					
	SIZE	FSCM NO.	DWG NO	REV	
	B	67131	01000	03	
DO NOT SCALE DRAWING	SCALE	2:1	SHEET		1 OF 1

CAPACITOR - (Y)
4700 pF ±20%, 250 VAC