


Quad ISDN U Interface Hybrid

0803-6204-02

ELECTRICAL SPECIFICATIONS @ 25°C

Turns Ratio PRI:SEC +/- 5%	Primary Inductance mH min	Leakage Inductance uH max	Primary DCR OHMS max	Secondary DCR OHMS max	Capacitance pF max	Isolation Voltage PRI:SEC Vrms
1.6:1	14.5	90	7	4.5	70	1500

MECHANICAL

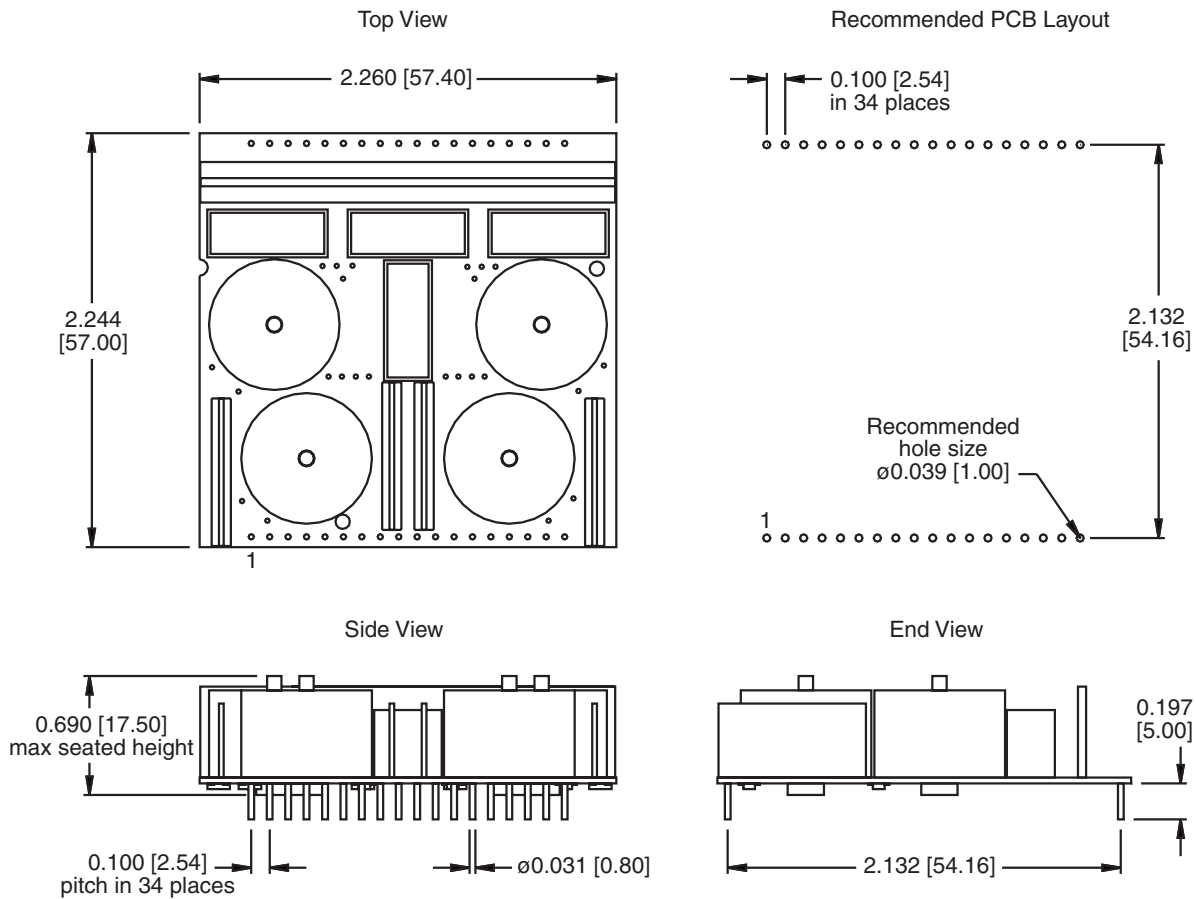

NOTES:

- NOT TO SCALE
- TOLERANCE +/- 0.2MM
- ALL DIMENSIONS IN MM
- PIN DIAMETER 0.75MM MAX.

