


LOC	DIST	P	F	REVISIONS				
				ZONE	LTR	DESCRIPTION	DATE	APPD
G	14				J	REL PER 063A-0636-00	29SEP00	JR TM

AMP WIRE RANGE	 Listed	 LR7189 Certified
12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED

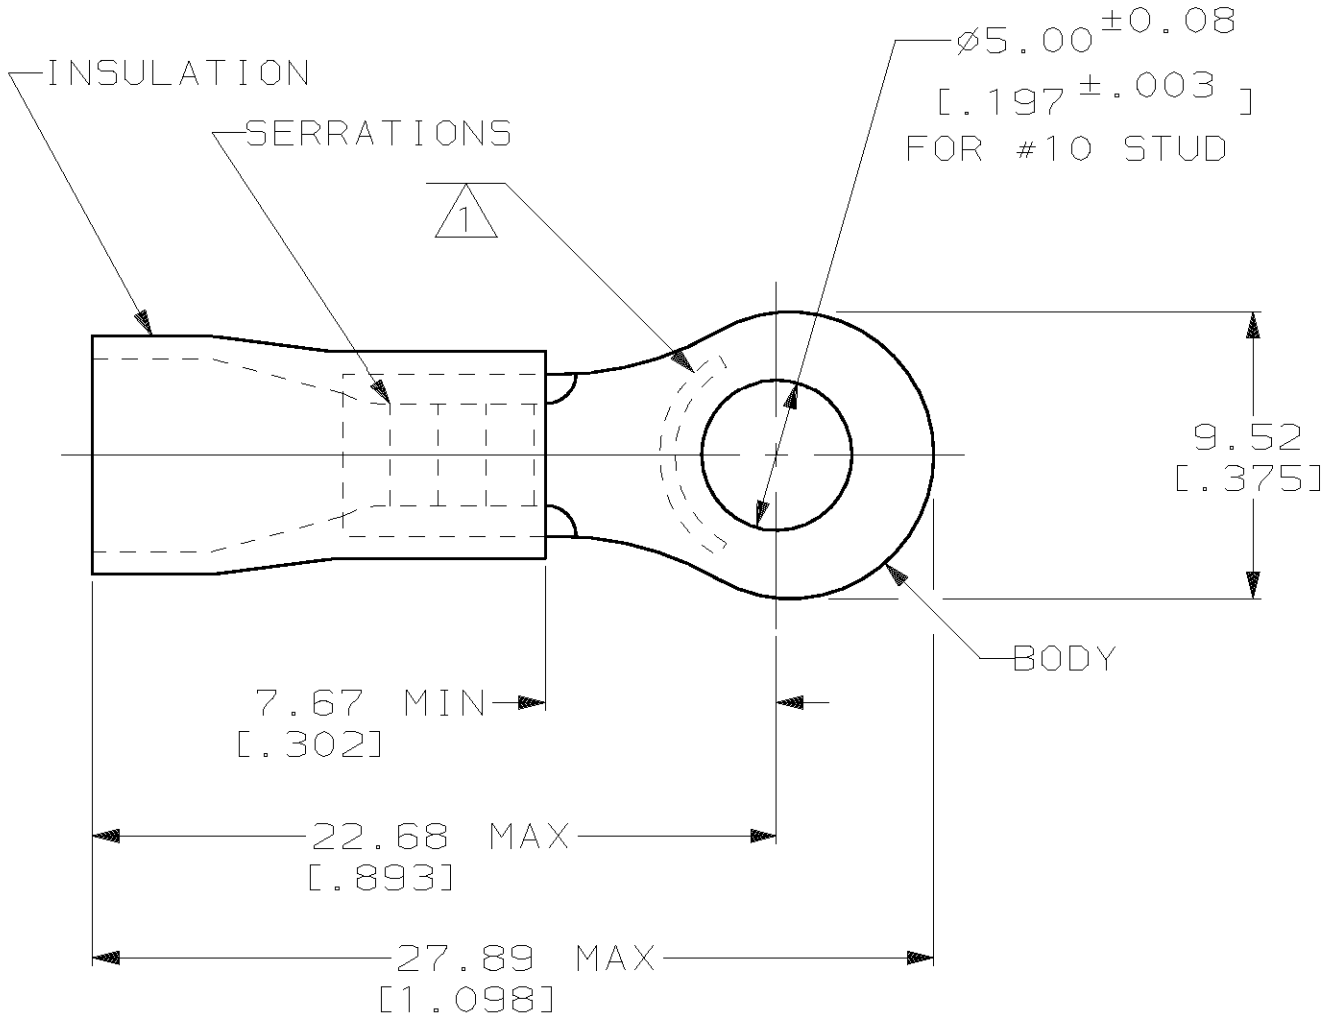

- 1 STAMP AMP 12-10* APPROX AS SHOWN
- 2 WIRE INSULATION DIA, .150-.250
- 3 TONGUE MATERIAL THK, 0.99±0.05 [.039±.002]

25	LOOSE PC, BAG	8-34854-5
4	LOOSE PC, BLS	8-34854-4
100	LOOSE PC, BOX	8-34854-1
1000	ON TAPE, REEL	2-34854-5
2500	ON TAPE, REEL	2-34854-1
-	LOOSE PIECE	34854
QUANTITY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			MAX RECOMMENDED OPERATING TEMPERATURE: 90°C MAX		DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.20 [.008] 3 PLC DEC ± - ANGLES ± -		DR 08/06/92 DK SCHRUM CHK 11/10/92 RE HERSEY APPD 11/10/92 ML ELLIS APPD 11/10/92 M BARNABA		QUANTITY		PACKAGE TYPE AMP AMP Incorporated Harrisburg, PA 17105-3608		PART NO		
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS		PRODUCT INFORMATION CENTER 1-800-522-6752		VOLTAGE RATING: NOT APPLICABLE		MATERIAL COPPER PER ASTM B-152 PVC COLOR, YELLOW		PRODUCT SPEC 108-1034		NAME TERMINAL, RING TONGUE, PLASTI-GRIP™					
FOR APPLICATION TOOLING INFORMATION		TOOLING ASSISTANCE CENTER 1-800-722-1111		CIRCULAR MIL AREA: 2.62-6.64mm² [5,180-13,100] -		FINISH TIN PLATE PER ASTM B 545		APPLICATION SPEC NOT AVAILABLE		SIZE B		CAGE CODE 00779		DRAWING NO C-34854	
FOR ORDER ENTRY		1-800-526-5142		THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.				WEIGHT -		SCALE 4:1		SHEET 1 OF 1			