



1.0 Amp ULTRA-FAST SWITCHING MEGARECTIFIERS

GUF10A... 10M Series

Description

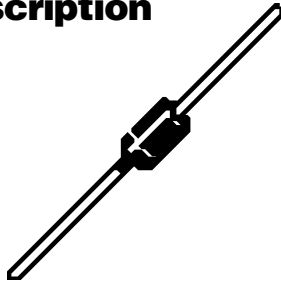

Mechanical Dimensions

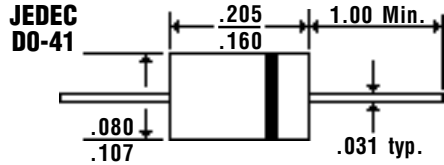






Features

- **HIGH TEMPERATURE METALLURGICALLY BONDED CONSTRUCTION**
- **1.0 AMP OPERATION @ $T_A = 55^\circ\text{C}$, WITH NO THERMAL RUNAWAY**
- **SINTERED GLASS CAVITY-FREE JUNCTION**
- **TYPICAL $I_R < 0.2 \mu\text{Amp}$**

Electrical Characteristics @ 25°C.	<i>GUF10A . . . 10M Series</i>								Units
Maximum Ratings	GUF 10A	GUF 10B	GUF 10D	GUF 10F	GUF 10G	GUF 10J	GUF 10K	GUF 10M	
Peak Repetitive Reverse Voltage... V_{RRM}	50	100	200	300	400	600	800	1000	Volts
RMS Reverse Voltage... $V_{R(rms)}$	35	70	140	210	280	420	560	700	Volts
DC Blocking Voltage... V_{DC}	50	100	200	300	400	600	800	1000	Volts
Average Forward Rectified Current... $I_{F(av)}$ Current 3/8" Lead Length @ $T_A = 55^\circ\text{C}$					1.0				Amps
Non-Repetitive Peak Forward Surge Current... I_{FSM} 8.3mS, 1/2 Sine Wave Superimposed on Rated Load					30				Amps
Forward Voltage @ Rated Forward Current and 25°C... V_F	< 1.1 > < 1.4 > < 1.7 >								Volts
Full Load Reverse Current... $I_R(av)$ Full Cycle Average @ $T_A = 55^\circ\text{C}$					50				μAmps
DC Reverse Current... I_R @ Rated DC Blocking Voltage					10				μAmps
					50				μAmps
Typical Junction Capacitance... C_j (Note 1)	< 17 >		< 15 >						pF
Typical Thermal Resistance... $R_{\theta JC}$ (Note 2)	< 50 >		< 60 >						°C/W
Typical Reverse Recovery Time... t_{RR} (Note 3)	< 50 >		< 75 >						nS
Operating & Storage Temperature Range... T_J, T_{STRG}	-65 to 175								°C

1.0 Amp ULTRA-FAST SWITCHING MEGARECTIFIERS

GUF10A... 10M Series

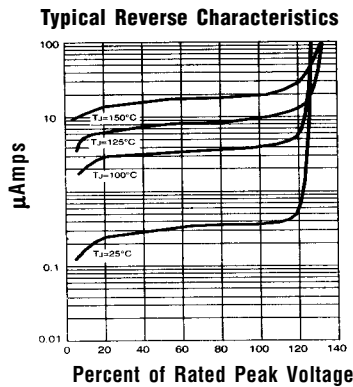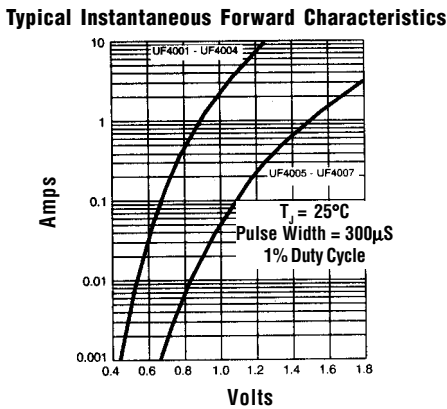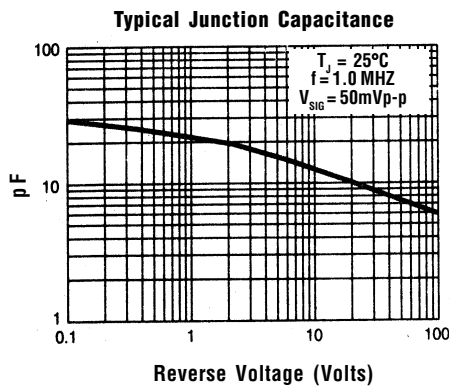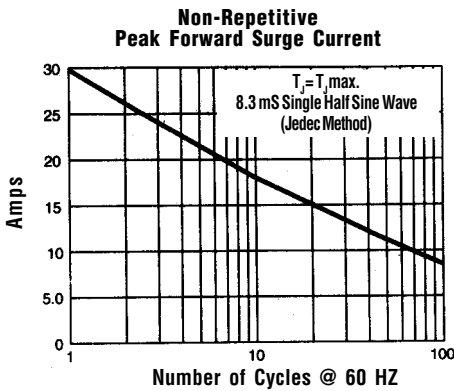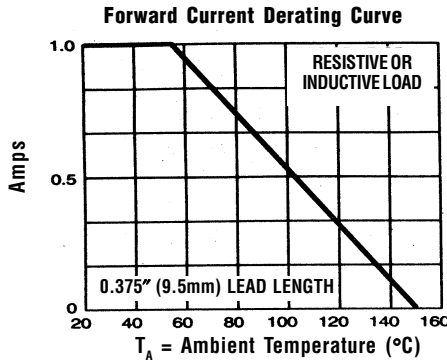

Ratings at 25 Deg. C ambient temperature unless otherwise specified.

Single Phase Half Wave, 60 HZ Resistive or Inductive Load.

For Capacitive Load, Derate Current by 20%.

- NOTES:**
1. Measured @ 1 MHz and applied reverse voltage of 4.0V.
 2. Thermal Resistance from Junction to Ambient at 3/8" Lead Length, P.C. Board Mounted.
 3. Reverse Recovery Condition $I_F = 0.5A$, $I_R = 1.0A$, $I_{RR} = 0.25A$.