






EICHHOFF

Zweipol-Funk-Entstörkondensatoren – Klasse X1
Two-pole Radio Interference Suppression Capacitors – Class X1
Condensateurs de déparasitage à 2 pôles – Classe X1

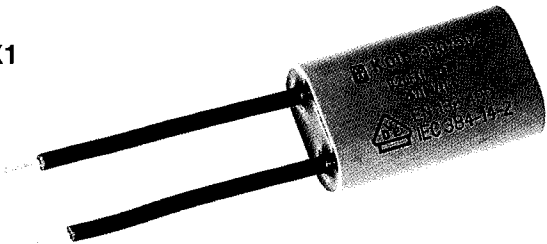

Nennkapazität Nominal value Capacité nominal	Gehäuse Encapsulation / Boîtier			Teile-Nr. Part number Référence
	a ± 1	b ± 1	l-3	
0,047 µF	9	20	30	K015-050/502
0,068 µF	9	20	35	K015-150/502
0,1 µF	8	20	41	K015-250/502
0,2 µF	13	22	39	K015-350/502
0,3 µF	15	25	45	K015-450/502
0,39 µF	16	30	45	K015-550/502
0,47 µF	16	30	45	K015-650/502
Weitere Kapazitätswerte auf Anfrage Other values upon request / D'autres capacités sur demande				

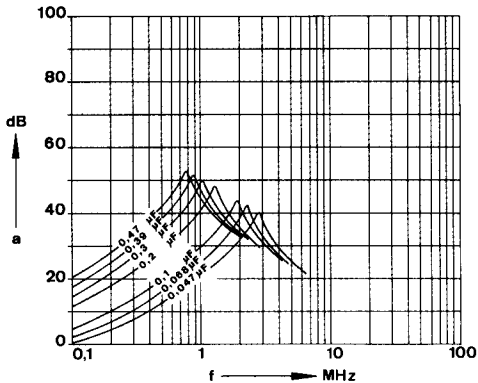

Einfügungsdämpfung
Insertion loss
Affaiblissement d'insertion

Nennspannung:
Rated voltage:
Tension nominale:

250 V ~

Kapazitätsabweichung:
Capacitance tolerance:
Tolérances des capacités:

± 20%

Kondensatorenklasse:
Capacitor class:
Classe de condensateur:

X1

Gehäuse:
Encapsulation:
Boîtier:

Isolierbecher
plastic can
boîtier isolant

Klimakategorie:
Climatic category:
Catégorie d' climatique:

25/100/21
(IEC 68-1)

Passive Entflammbarkeit:
Letter indicating passive
flammability category:
Catégorie d' inflammabilité:

C
(IEC 384-14/2)

Anschlüsse:

Cu-Litze Typ H05V-K 0,5 mm²,
(mit Prüfzeichen , AWG 20)
Anschlußenden abisoliert

Leads:

stranded copper wire type H05V-K 0.5 mm²,
(with Approval , AWG 20)
ends stripped

Connexions:

toron de cuivre type H05V-K 0,75 mm²,
(avec Homologations , AWG 20)
bouts dénudés

Prüfzeichen:
Approvals:
Homologations:

 EN 132 400
IEC 384-14-2

