


Features

- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High Efficiency
- Low Reverse Leakage Current
- For Use in High Frequency Inverters, Free Wheeling, and Polarity Protection Applications
- High Forward Surge Current Capability
- **Lead Free Finish, RoHS Compliant (Note 1)**
- **"Green" Molding Compound (No Br, Sb)**
- **Qualified to AEC-Q101 Standards for High Reliability**

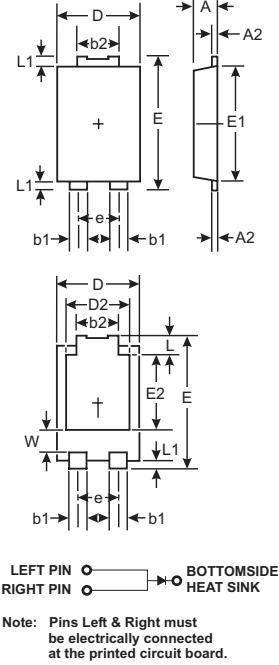

PowerDI™ 5		
Dim	Min	Max
A	1.05	1.15
A2	0.33	0.43
b1	0.80	0.99
b2	1.70	1.88
D	3.90	4.05
D2	3.05 NOM	
E	6.40	6.60
e	1.84 NOM	
E1	5.30	5.45
E2	3.55 NOM	
L	0.75	0.95
L1	0.50	0.65
W	1.20	1.50
All Dimensions in mm		

Mechanical Data

- Case: PowerDI™ 5
- Case Material: Molded Plastic, "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Finish – Matte Tin annealed over Copper leadframe. Solderable per MIL-STD-202, Method 208 (E3)
- Polarity: See Diagram
- Marking: See Page 3
- Weight: 0.093 grams (approximate)

Maximum Ratings @ T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	V _{RRM}	60	V
Working Peak Reverse Voltage	V _{RWM}		
DC Blocking Voltage	V _R		
RMS Reverse Voltage	V _{R(RMS)}	42	V
Average Rectified Output Current (See also Figure 4)	I _O	3	A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load	I _{FSM}	100	A
Operating Temperature Range	T _j	-65 to +150	°C
Storage Temperature Range	T _{STG}	-65 to +150	°C

Thermal Characteristics @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Typ	Max	Unit
Thermal Resistance Junction to Soldering Point	R _{θJS}	—	3.0	°C/W
Thermal Resistance Junction to Ambient Air (Note 2)	R _{θJA}	95	—	°C/W
Thermal Resistance Junction to Ambient Air (Note 3)	R _{θJA}	70	—	°C/W
Thermal Resistance Junction to Ambient Air (Note 4)	R _{θJA}	50	—	°C/W

- Notes:
1. RoHS revision 13.2.2003. Glass and High Temperature Solder Exemptions Applied, see *EU Directive Annex Notes 5 and 7*.
 2. FR-4 PCB, 2 oz. Copper, minimum recommended pad layout per <http://www.diodes.com/datasheets/ap02001.pdf>.
 3. Polyimide PCB, 2 oz. Copper, minimum recommended pad layout per <http://www.diodes.com/datasheets/ap02001.pdf>.
 4. Polyimide PCB, 2 oz. Copper. Cathode pad dimensions 9.4 mm x 7.4 mm. Anode pad dimensions 2.7 mm x 1.6 mm.

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 5)	$V_{(BR)R}$	60	—	—	V	$I_R = 0.2\text{mA}$
Forward Voltage	V_F	—	0.57 0.53 0.51 0.70 0.62 0.60	0.62 0.60 0.57 0.76 0.70 0.66	V	$I_F = 3\text{A}, T_J = 25^\circ\text{C}$ $I_F = 3\text{A}, T_J = 100^\circ\text{C}$ $I_F = 3\text{A}, T_J = 125^\circ\text{C}$ $I_F = 6\text{A}, T_J = 25^\circ\text{C}$ $I_F = 6\text{A}, T_J = 100^\circ\text{C}$ $I_F = 6\text{A}, T_J = 125^\circ\text{C}$
Reverse Leakage Current (Note 5)	I_R	—	3 — 1.5	150 10 15	μA mA mA	$T_J = 25^\circ\text{C}, V_R = 60\text{V}$ $T_J = 100^\circ\text{C}, V_R = 60\text{V}$ $T_J = 125^\circ\text{C}, V_R = 60\text{V}$

Notes: 5. Short duration test pulse used to minimize self-heating effect.

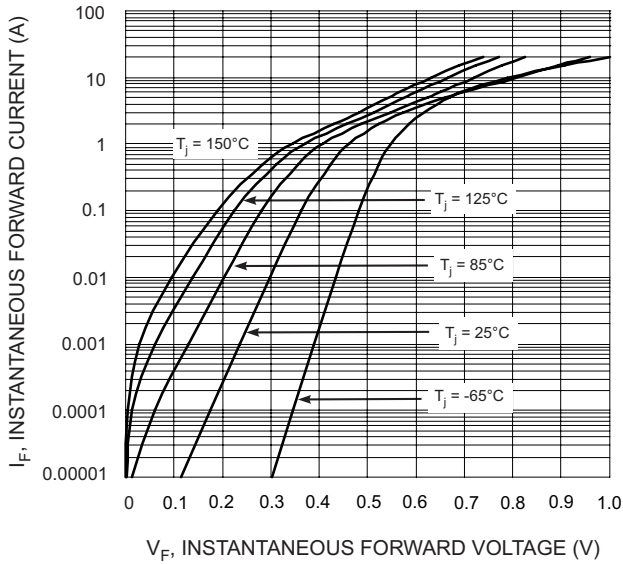


Fig. 1 Typical Forward Characteristics

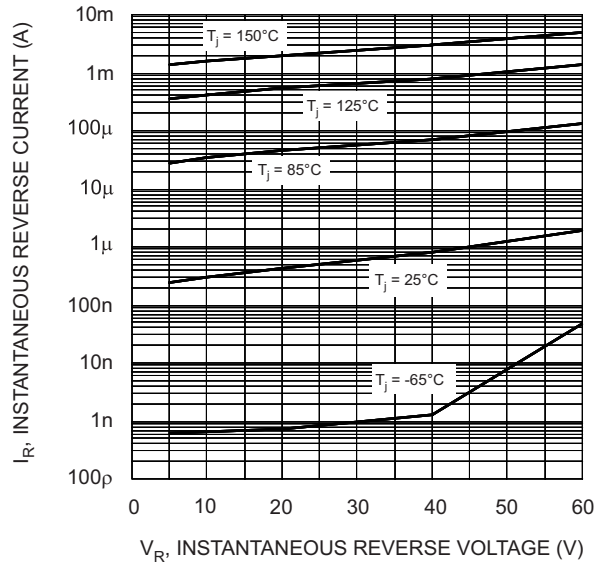


Fig. 2 Typical Reverse Characteristics

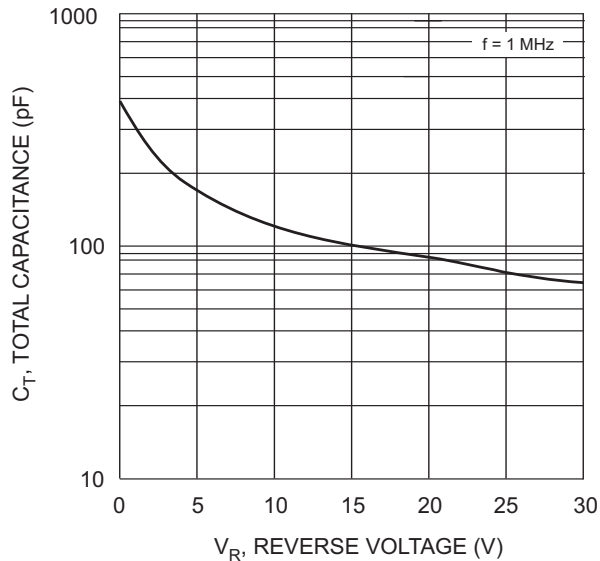


Fig. 3 Typical Capacitance vs. Reverse Voltage



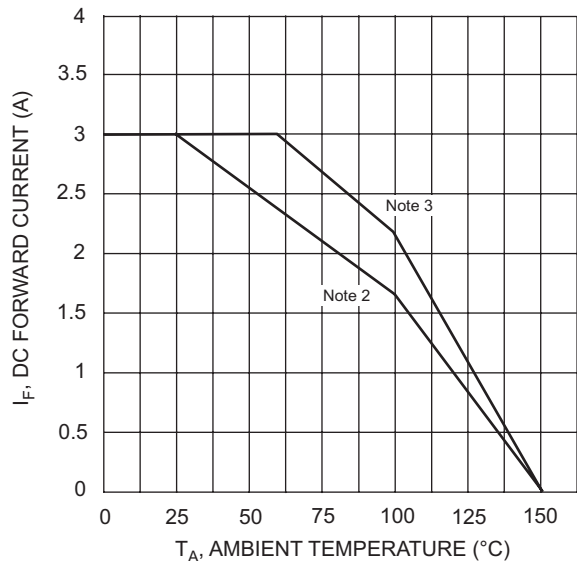


Fig. 4 DC Forward Current Derating

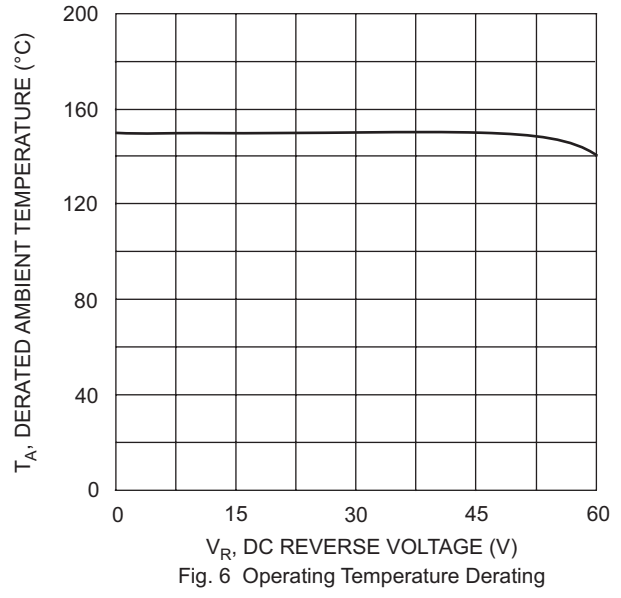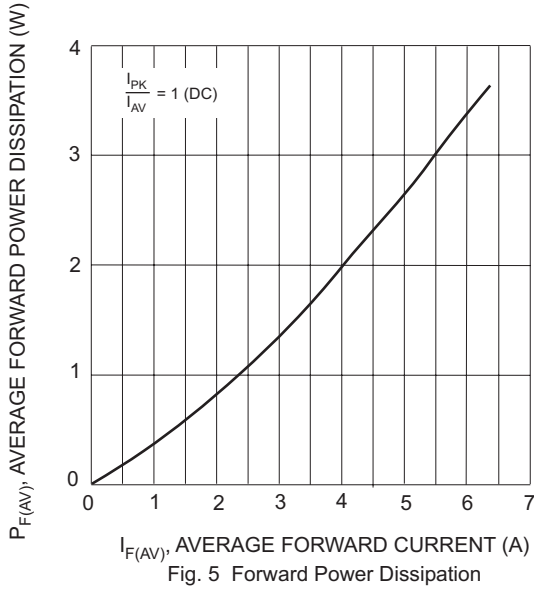


Ordering Information (Note 6)

Device	Packaging	Shipping
PDS360-13	PowerDI™5	5000/Tape & Reel

Notes: 6. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



S360 = Product type marking code
 Ⓜ = Manufacturers' code marking
 YYWW = Date code marking
 YY = Last two digits of year ex: 05 for 2005
 WW = Week code 01 to 52
 K = Factory Designator